
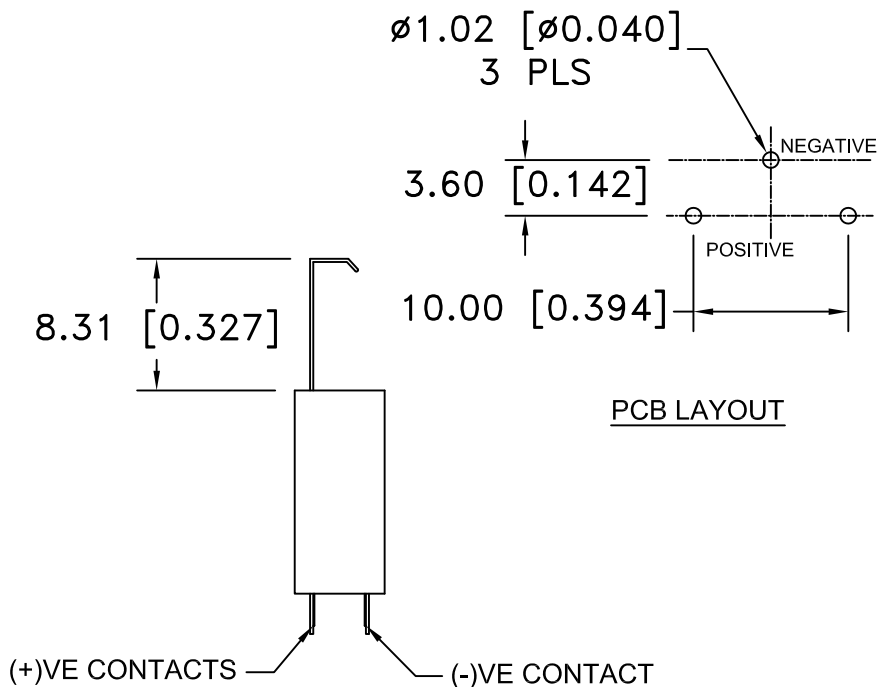
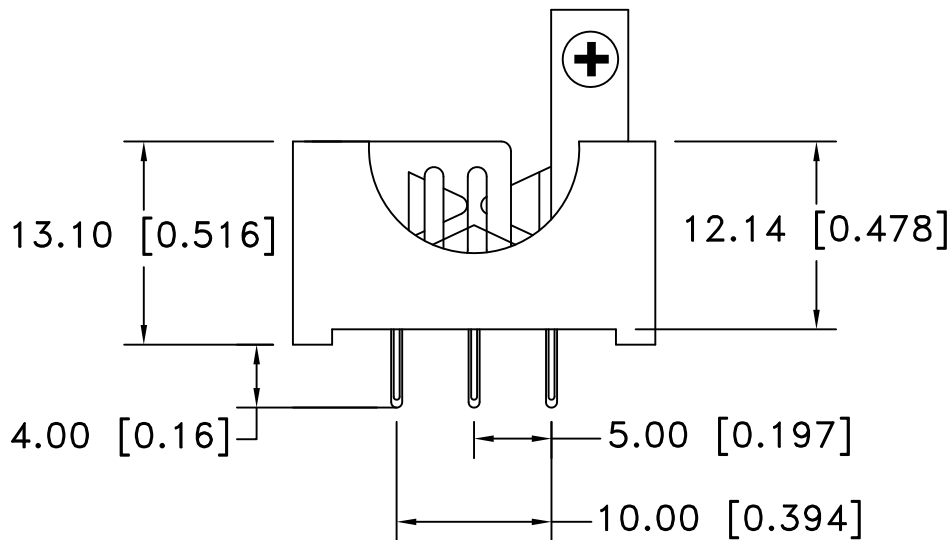



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/07/14	A	DIM. 8.31 WAS 8.51	T.B.	B.S.	

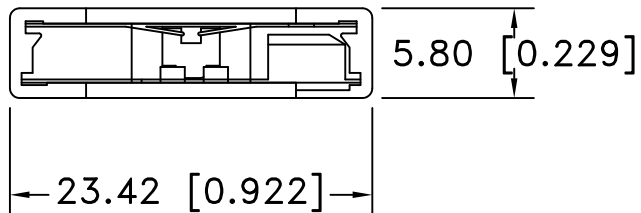

NOTES:  
MATERIAL: GLASS FILLED NYLON 66, UL94V-0  
COLOR BLACK, UL FILE NO. E196894  
CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED  
ELECTRICAL :  
VOLTAGE: 250V AC  
CONTACT RESISTANCE: 30mΩ MAX  
INSULATION RESISTANCE: 1000mΩ AT DC 500V  
DIELECTRIC STRENGTH: AC 1000V PER MINUTE  
TEMPERATURE RANGE: -40°C TO +200°C  
ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title	Approved By T.B.	
Angular ± 3°	Date	Drawing Number	
	3/07/14	BK-5058-4MM	