



Shown with Packard Connector



MSP340

Pressure Transducer

SPECIFICATIONS

- **Low Cost OEM**
- **100% Leak Proof**
- **No O-Rings**
- **No Silicon Oil**
- **No Welds**

The MSP340 pressure transducer from the Microfused™ line of MEAS is great for high volume, commercial and industrial applications. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings, welds or organics exposed to the pressure media. The durability is excellent.

MEAS' proprietary Microfused™ technology, derived from demanding aerospace applications, employs micromachined silicon piezoresistive strain gages fused with high temperature glass to a stainless steel diaphragm. This approach achieves media compatibility simply and elegantly while providing an exceptionally stable sensor without the p-n junctions of conventional micromachined sensors.

This product is geared to the OEM customer who uses medium to high volumes. The standard version is suitable for many applications, but the dedicated design team at our Transducer Engineering Center stands ready to provide a semi-custom design where the volume and application warrants.

FEATURES

- One-Piece Stainless Steel Construction
- Ranges up to 10kpsi or 700Bar
- mV or Amplified Outputs
- Ultra Compact Construction
- Hermetically Isolated Sensor Technology

APPLICATIONS

- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- After Market Automotive
- Tank Pressure in Breathing Apparatuses
- Agriculture – Sprayers and Dusters
- Refrigeration – Freon and Ammonia Based

STANDARD RANGES

| Range | psig | Range | Barg |
|--------------|-------------|--------------|-------------|
| 0 to 50 | • | 0 to 3 | • |
| 0 to 100 | • | 0 to 7 | • |
| 0 to 300 | • | 0 to 20 | • |
| 0 to 500 | • | 0 to 35 | • |
| 0 to 1k | • | 0 to 70 | • |
| 0 to 3k | • | 0 to 200 | • |
| 0 to 5k | • | 0 to 350 | • |
| 0 to 10k | • | 0 to 700 | • |

PERFORMANCE SPECIFICATIONS

Supply Voltage: 5.0V, Ambient Temperature: 25°C (unless otherwise specified)



| PARAMETERS | MIN | TYP | MAX | UNITS | NOTES |
|--|---|--------|------|---------|-------|
| Zero Offset Tolerance | -2.0 | | 2.0 | %F.S. | 1 |
| Span Tolerance | -2.0 | | 2.0 | %F.S. | 1 |
| Accuracy (combined non linearity, hysteresis, and repeatability) | -1.0 | | 1.0 | %F.S. | 2 |
| Long Term Stability (1 year) | -0.25 | | 0.25 | %F.S. | |
| Isolation, Body to Any Lead (@250Vdc) | 50 | | | MΩ | |
| Temperature Error – Zero | -2.0 | | 2.0 | %F.S. | |
| Temperature Error – Span | -2.0 | | 2.0 | %F.S. | |
| Compensated Temperature | 0 | | 55 | °C | |
| Operating Temperature | -20 | | +85 | °C | |
| Storage Temperature | -40 | | +85 | °C | |
| Pressure Cycles (Zero to Full Scale) | 10 | | | Million | |
| Proof Pressure | 2X | | | Rated | |
| Burst Pressure | 5X | | | Rated | |
| Load Resistance (RL, mV Output) | | RL > 1 | | MΩ | |
| Load Resistance (RL, V Output) | | RL > 5 | | KΩ | |
| Bandwidth | DC to 1KHz (typical) | | | | |
| Shock | 50g, 11 msec Half Sine Shock per MIL-STD-202G, Method 213B, Condition A | | | | |
| Vibration | ±20g, MIL-STD-810C, Procedure 514.2-2, Curve L | | | | |

For custom configurations, consult factory.

Notes

1. Over compensated temperature range.
2. Best fit straight line.

DIMENSIONS

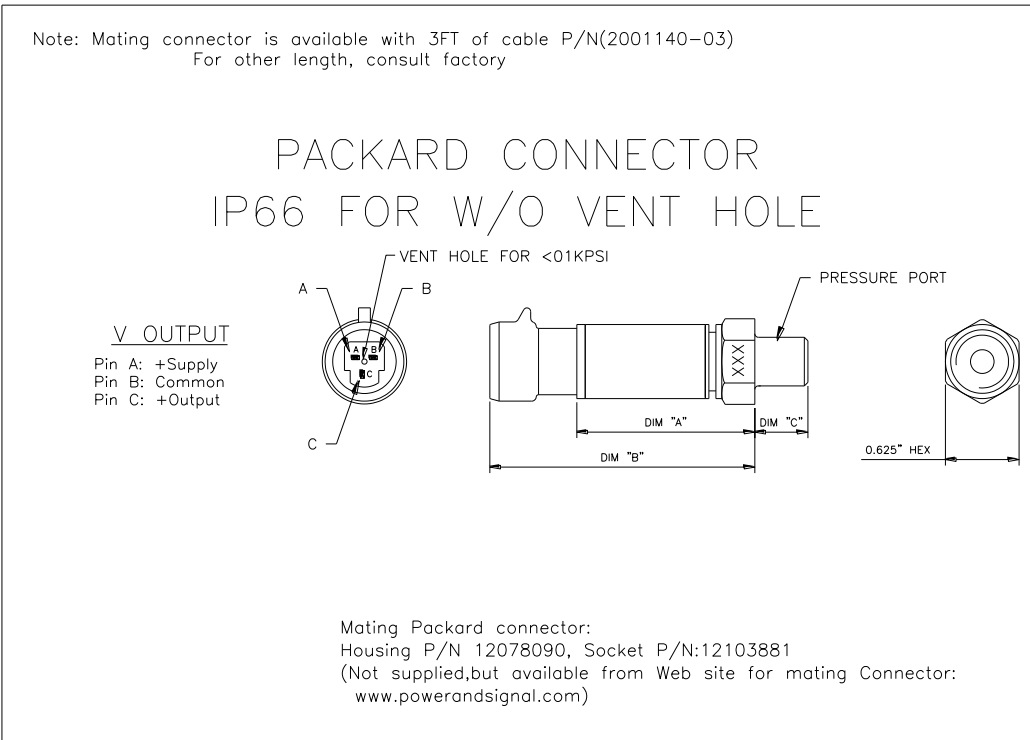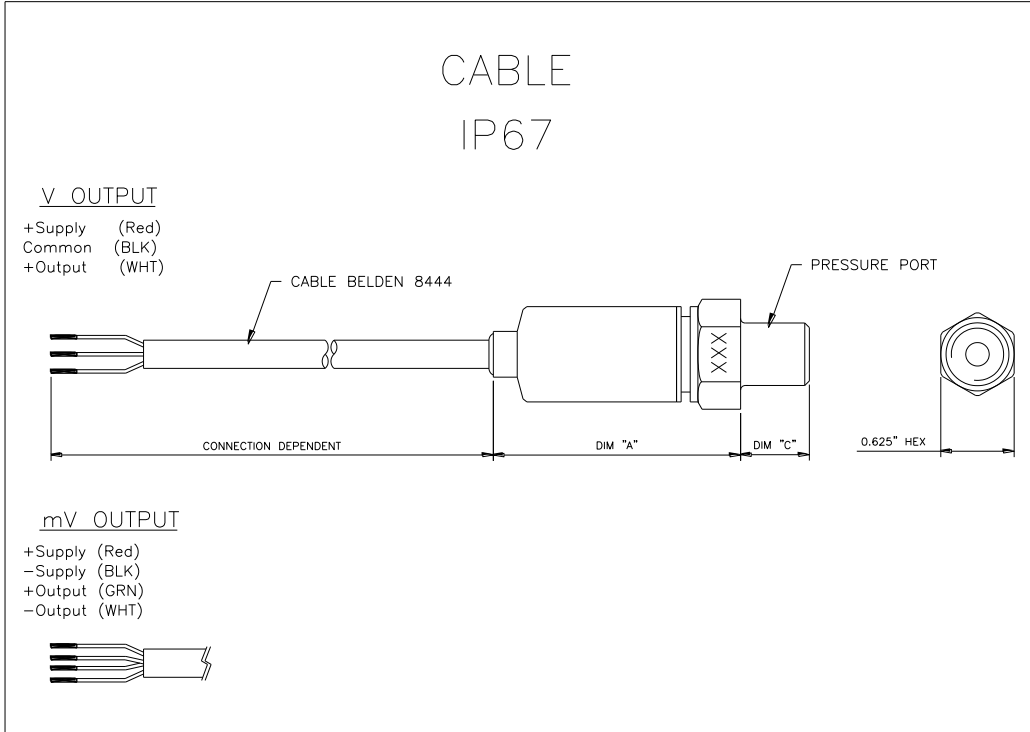

MSP340

Pressure Transducer

| PRESSURE PORT | | |
|---------------|---|-----------------|
| CODE | PORT | DIM C |
| 2 | 1/4-19 BSPP | 0.47 [11.94] |
| 3 | 1/8-28 BSPP | 0.315 [8.00] |
| 4 | 7/16-20 UNF MALE SAE J514 STRAIGHT THREAD O-RING BUNA-N 70SH -904 ID8.92mmXW1.83 mm | 0.385 [9.70] |
| 5 | 1/4-18 NPT | 0.45 [11.43] |
| 6 | 1/8-27 NPT | 0.45 [11.43] |

| CODE | CONNECTION | DIMENSIONS | |
|------|-------------------------------------|------------|-------------|
| | | | |
| 1 | CABLE,4 WIRE BELDEN#8444, 2 FEET | DIM A | 1.62[41.15] |
| 2 | CABLE,4 WIRE BELDEN#8444, 4 FEET | DIM A | 1.62[41.15] |
| 4 | PACKARD Metri-Pack CONNECTOR | DIM A | 1.68[42.67] |
| | | DIM B | 2.43[61.72] |

OUTPUT OPTIONS

| Code | Output | Supply(V) | | |
|------|--------------------------|-----------|-----|------|
| | | MIN | TYP | MAX |
| 2 | 0 – 20mV/V (ratiometric) | 2.5 | 5 | 12 |
| 3 | 0.5 – 4.5V (ratiometric) | 4.75 | 5 | 5.25 |
| 4 | 1 – 5V | 10 | | 30 |


Packard connector not available with mV output.

Wiring Code

| Code | Output | +Supply | -Supply | +Out | -Out |
|------|---------------------------|---------|----------------|-------|-------|
| 2 | 0 – 20mV/V (ratiometric) | Red | Black | Green | White |
| 3 | 0.5 – 4.5 V (ratiometric) | Pin A | Pin B [Common] | Pin C | N/A |
| 4 | 1 – 5 V | Pin A | Pin B [Common] | Pin C | N/A |

ORDERING INFORMATION

M3421-000002-050PG

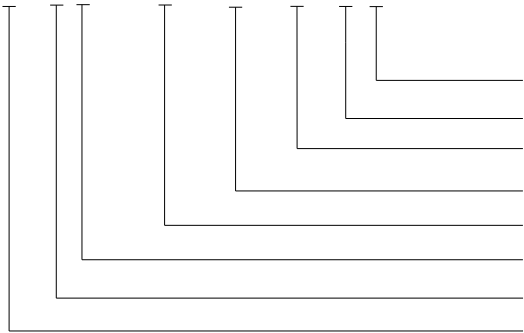

- Type (G = Gage)
- Units (P = psi, B = Bar)
- Pressure Range (See Standard Ranges Table)
- Pressure Port (See Pressure Port Table)
- Specials (nnnnn = Custom Drawing)
- Electrical Connection (1 = 2ft Cable, 2 = 4ft Cable, 4 = Packard Metri-Pack)
- Output (See Output Options Table)
- Model

NORTH AMERICA

Measurement Specialties, Inc.,
 a TE Connectivity Company
 45738 Northport Loop West
 Fremont, CA 94538
 Tel: 1-800-767-1888
 Fax: 1-510-498-1578
 Sales: pfg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties (Europe), Ltd.,
 a TE Connectivity Company
 26 Rue des Dames
 78340 Les Clayes-sous-Bois, France
 Tel: +33 (0) 130 79 33 00
 Fax: +33 (0) 134 81 03 59
 Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
 a TE Connectivity Company
 No. 26 Langshan Road
 Shenzhen High-Tech Park (North)
 Nanshan District, Shenzhen 518057
 China
 Tel: +86 755 3330 5088
 Fax: +86 755 3330 5099
 Sales: pfg.cs.asia@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.