
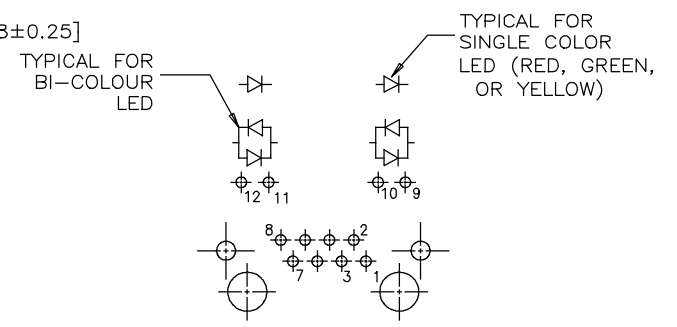
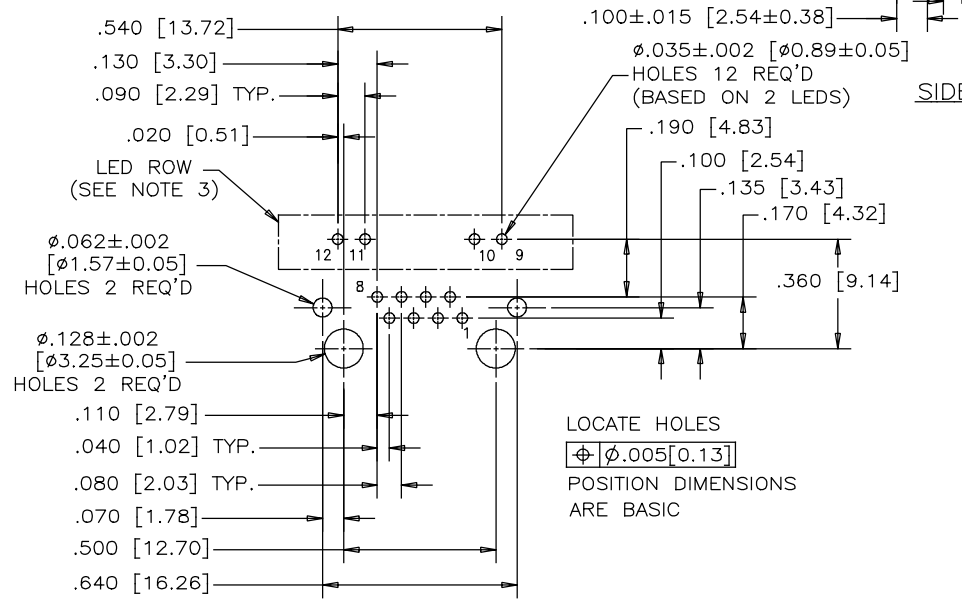



REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
K		UPDATED TOLERANCES	APR03/14	L.CHAN
M		ADD DIMENSIONS	MAY14/15	L.CHAN
N		ADD SIDE VIEW FOR PANEL	SEP26/16	L.CHAN

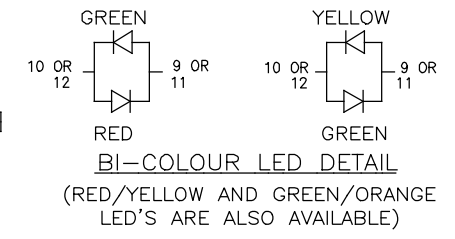

- NOTES:
- MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK

 CONTACTS: PHOSPHOR BRONZE
 PLATING: 50 μ" [1.27 MICRONS]
 MIN. GOLD ON MATING SURFACES.
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

 SHIELD: STAINLESS STEEL WITH TIN DIP ON SOLDER TAIL
 - RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING AT 260°C MAXIMUM FOR 5 SEC MAXIMUM.
 - P.C.B. HOLE LAYOUT:
 AMPHENOL PART NUMBER RJHSE-538X P.C.B LAYOUT LED HOLES ARE OPTIONAL.
 - PART NUMBER: RJHSE-538X
 REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

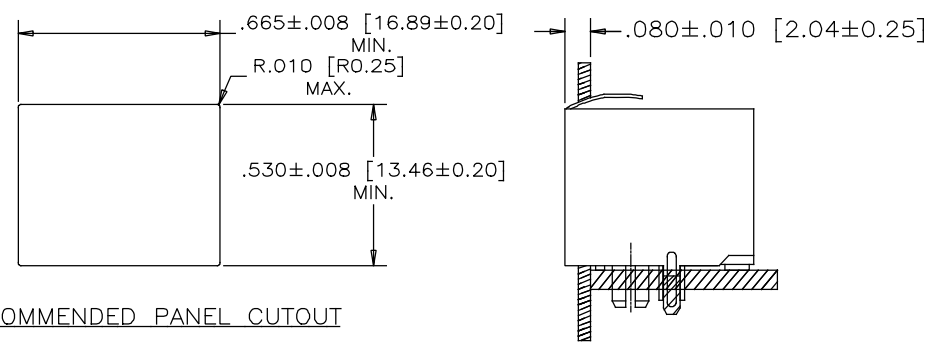

RECOMMENDED PANEL CUTOUT

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN PAULW	DATE APR13/06
DESIGNED	
CHECKED CHIGOW	APR13/06
I. E. APPRD.	
Q. A. APPRD.	
DWG. APPRD.	
ENG. REL. NO.	
REF.	
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554
SCALE	WT. ----- SURF. ----- SHEET 1 OF 1

Amphenol Canada Corp.

TITLE
 HIGH SPEED, RJ45, MODULAR JACK,
 8 POSITION, 8 CONTACTS,
 SHIELDED, WITH LEDs - RoHS COMPLIANT

DWG DRAWING NO. P-RJHSE-538X REV. N