THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

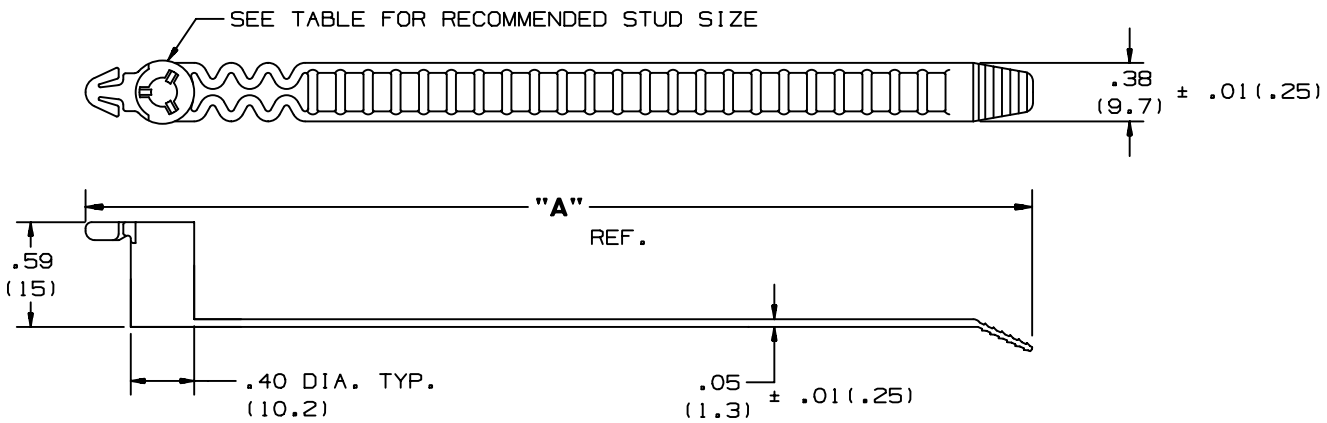

PANDUIT PART NO. *	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	"A" in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs (g)/100 pcs	RECOMMENDED STUD SIZE STUD	RECOMMENDED STUD SIZE LENGTH (min.)
PRST30S-S14-30	.125 (3.2)	1.18 (30)	5.2 (132)	35 (156)	STANDARD	.36 (162)	10-24 (5)	.5 (12 OR 14)

NOTES:

* SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	DESCRIPTION	ECN - R		CUST	SUP
10	11/15/01	JABO		STANDARDIZED STUD SIZE COLUMN	21794	10		

PANDUIT CORP. TINLEY PARK, ILLINOIS

STUD MOUNT CABLE TIE
PRST SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± .1(2.5) (.XXX) ± ------
(.XX) ± .02(.5) ANGLES ± ------

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: WKS
DATE: 6-15-87
CHK'D: HVP

MAT'L: HEAT STABILIZED BLACK NYLON 6/6

SCALE: ~

DRAWING NO. SS-21794

DWG SIZE: A