




Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------


Hybrid cable, double ended,
4 x 2 x AWG 26/7 + 3 x 2.5 mm²

Length: a = 1 m	AC version DC version	33 57 211 0010 001 33 57 211 0010 002
a = 5 m	AC version DC version	33 57 211 0050 001 33 57 211 0050 002
a = 10 m	AC version DC version	33 57 211 0100 001 33 57 211 0100 002
a = 20 m	AC version DC version	33 57 211 0200 001 33 57 211 0200 002

double ended

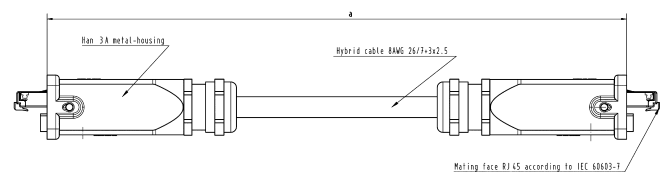

a = length




Hybrid cable, single ended,
4 x 2 x AWG 26/7 + 3 x 2.5 mm²

Length: a = 1 m	AC version DC version	33 57 111 0010 002 33 57 111 0010 001
a = 5 m	AC version DC version	33 57 111 0050 002 33 57 111 0050 001
a = 10 m	AC version DC version	33 57 111 0100 002 33 57 111 0100 001
a = 20 m	AC version DC version	33 57 111 0200 002 33 57 111 0200 001

Protection level: IP 65 / IP 67

Data part: Transmission properties in accordance with
ISO/IEC 11801:2002: Class D

single ended



a = length

Hybrid outdoor cable

Length: 10 m	33 57 851 0100 001
Length: 20 m	33 57 851 0200 001
Length: 500 m	33 57 851 5000 001



PVC jacket
4 x 2 x AWG 26/7 + 3 x 2.5 mm²
Outer diameter: 12 mm
Min. bending radius:
single: 5 x OD
repeated: 10 x OD