


1

2



3

4

5

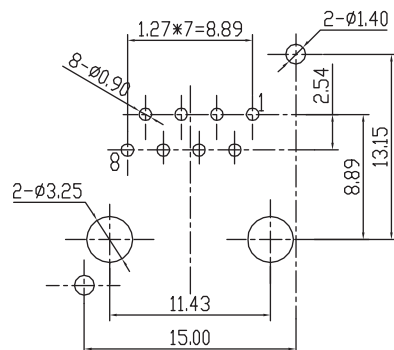

PCB LAYOUT - COMPONENT VIEW

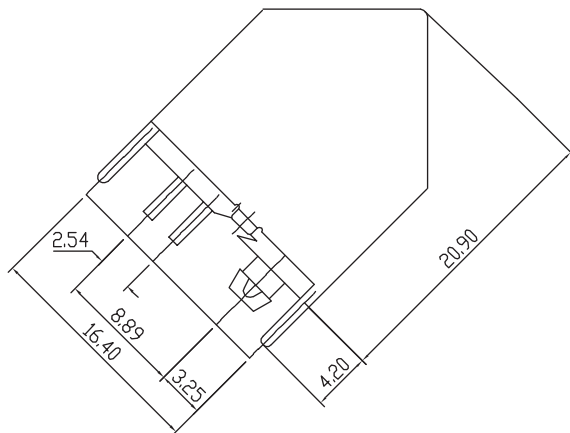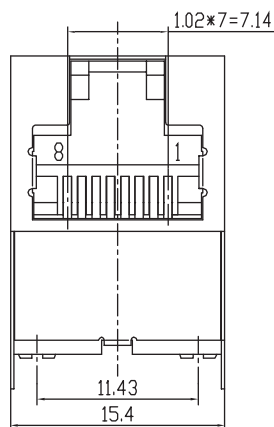

## TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR MATERIAL: PBT  
 FLAMMABILITY RATING: UL94-V0  
 COLOR: WHITE  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: GOLD  
 SHIELDING: BRONZE NI PLATED  
 QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 °C UP TO 85 °C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 1.5 A  
 WORKING VOLTAGE: 125 VAC  
 INSULATION RESISTANCE: >500 MΩ  
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MIN  
 CONTACT RESISTANCE: 20 mΩ MAX


STANDARD  
 CERTIFIED: E324776

SOLDERING  
 JEDEC LEAD FREE WAVE SODLERING PROCESS

PACKAGING  
 TRAY

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1



DRAW:

DESCRIPTION: 45° ENTRY SHIELDED 8P8C MODULAR JACK REVERSE  
 MATAL POST TAIL

WERI PART NO: 615 008 145 121

SIZE

**A4**

G					GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		DESCRIPTION: 45° ENTRY SHIELDED 8P8C MODULAR JACK REVERSE MATAL POST TAIL	SIZE <b>A4</b>
F								
E	03-APR-14	DRAWING UPDATE	QL					
D	03-JAN-14	UL & TEMP UPDATE	QL					
C	07-JUL-10	NEW MEASURES	GG					
B	08-OCT-09	NEW DRAW	JP					
A	23-FEB-09	PDF	JP					
REV	DATE	FILE	BY					