

Customer Information Sheet

DRAWING No.: M22-267XXXX

SHEET 2 OF 2

IF IN DOUBT - ASK

(C)

NOT TO SCALE



THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

NOTES:
1. ALL TOLERANCES ARE ± 0.25 UNLESS OTHERWISE STATED.

OBSOLETE

SPECIFICATIONS:
 MATERIAL:
 MOULDING = NYLON 6T, UL94V-0, BLACK
 CONTACT = PHOSPHOR BRONZE
 FINISH:
 05 = GOLD
 46 = 100% TIN
 ELECTRICAL:
 CURRENT RATING = 1A
 CONTACT RESISTANCE = 30 m Ω MAX
 INSULATION RESISTANCE = 100 M Ω MIN
 DIELECTRIC STRENGTH = 650V AC/DC
 ENVIRONMENTAL:
 TEMPERATURE RANGE = -40°C TO +105°C
 PACKING:
 BAG
 FOR COMPLETE SPECIFICATION, SEE
 COMPONENT SPECIFICATION C018XX
 (LATEST ISSUE)

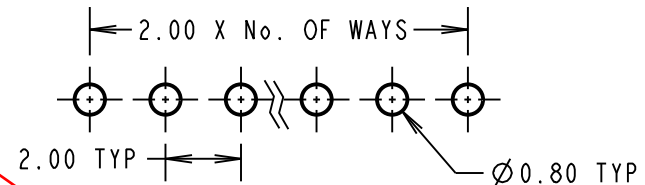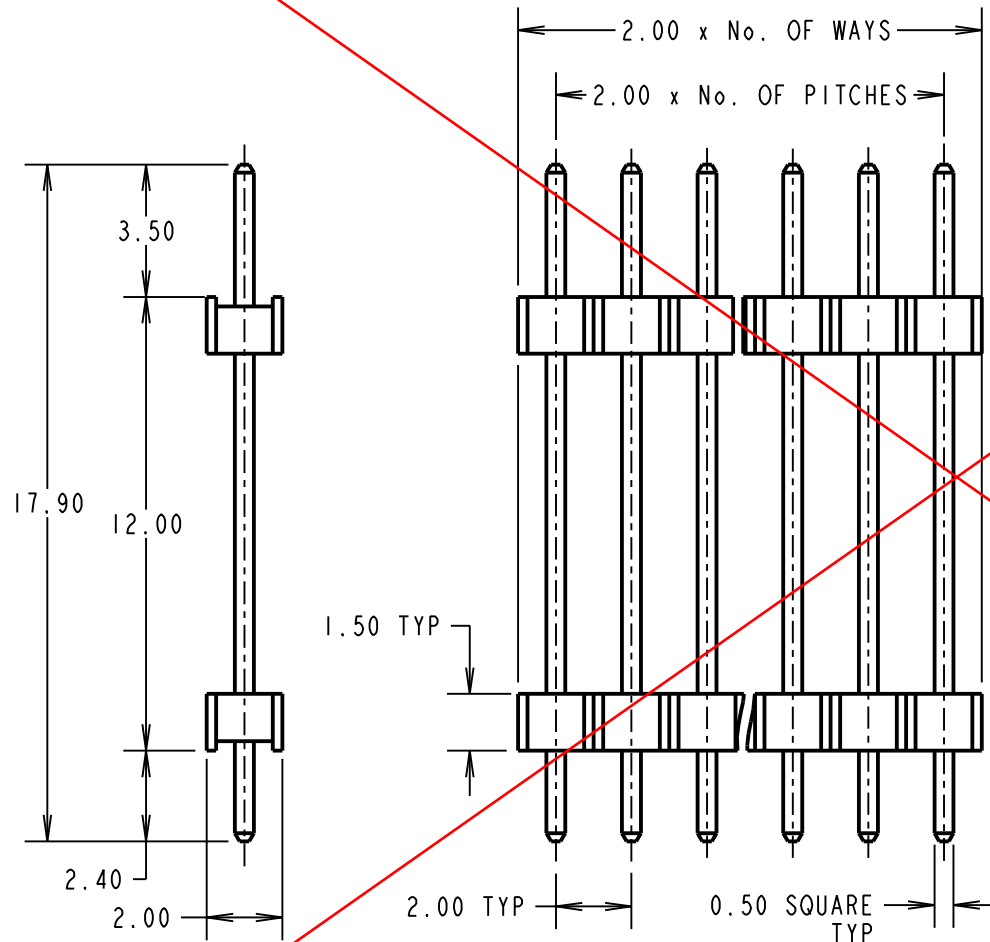

RECOMMENDED PCB LAYOUT

ORDER CODE:
M22-267XXXX

NO. OF WAYS: _____
 02 TO 50

FINISH: _____
 05 = GOLD OVER NICKEL
 46 = 100% TIN OVER NICKEL

SM	6	20.10.10	10984
NAME	ISS.	DATE	C/NOTE
APPROVED: S. MCCULLAGH			
CHECKED:		R. ADDE	
DRAWN:		D. BECK	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X = ± 1 mm
 X.X = ± 0.25 mm
 X.XX = ± 0.10 mm
 X.XXX = ± 0.01 mm
 ANGLES = $\pm 5^\circ$
 UNLESS STATED

MATERIAL:
 SEE ABOVE

FINISH:
 SEE ABOVE

S/AREA: mm²

TITLE:
 2.00mm PITCH SIL
 EXTENDED PC TAIL PIN HEADER

DRAWING NUMBER:
M22-267XXXX

SHT
 2 OF 2