

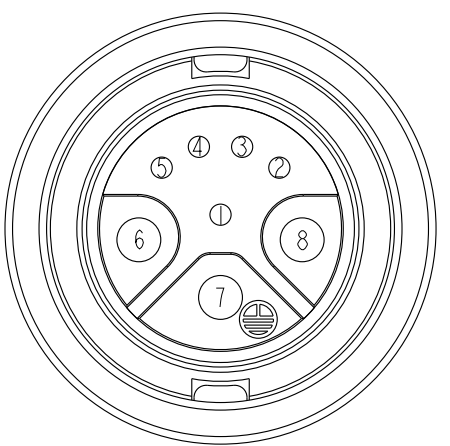

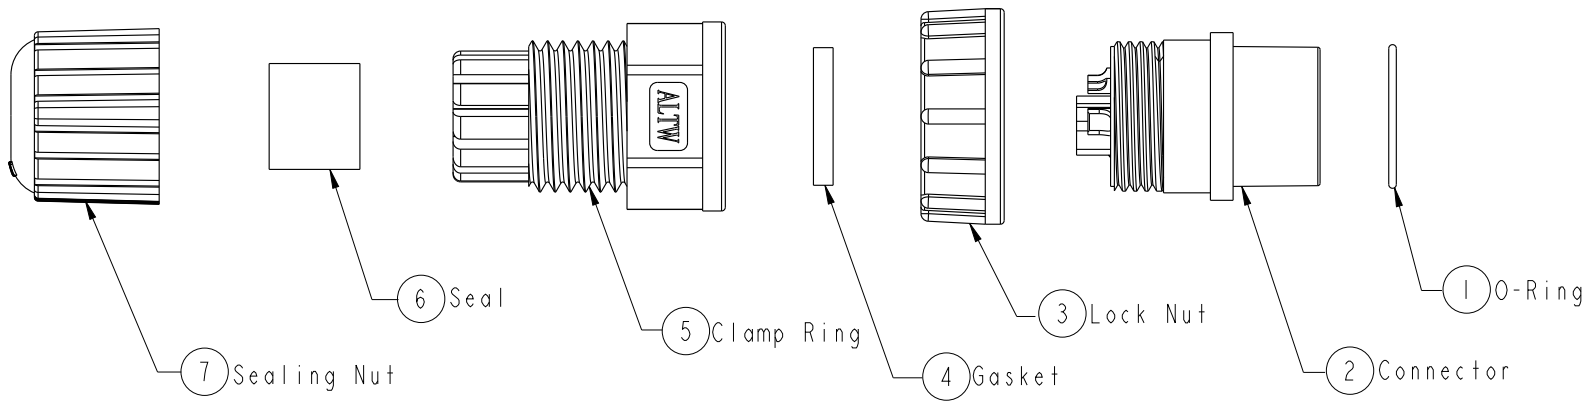


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1350058	2013/04/24	Ruru	Modify Cable OD Max
C	LEN1670219	2016/07/18	Joyy	Modify The Color Of The Gasket



Conn.
Pin Assigments
Front View

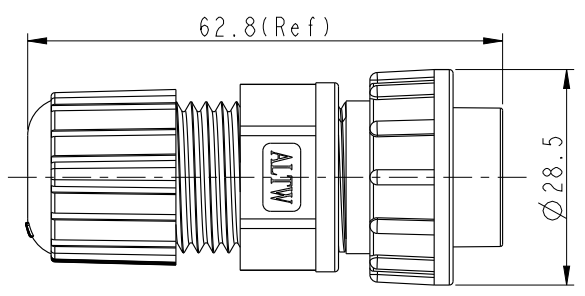

- Note:
- * \varnothing Important Dimension To Check
 - * Waterproof Rate: IP67
 - * O-Ring: Silicone, Gray
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Lock Nut: Nylon+GF, Black
 - * Gasket: Silicone, Black
 - * Clamp Ring: Nylon, Black
 - * Seal: Silicone, Gray
 - * Sealing Nut: Nylon, Black
 - * Cable OD Max: $\varnothing 9.5 \sim \varnothing 10.8\text{mm}$

UNIT:mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	±1°	

TITLE Large Assy Connector FConn 3MPin(20A)+5FPin(2A)			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. B.2	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO DCU-08BFEA-LL7001	DRAWN BY Joyy	DATE 2016-07-18
DWG NO DCU-08BFEA-LL7001	CHECKED BY Ma Fei	DATE 2016-07-18
CUSTOMER ALTW	APPROVED BY Joyy	DATE 2016-07-18