


R75L, Film, Metallized Polypropylene, General Purpose, 0.068  $\mu$ F, 10%, 560 VDC, 85C, Lead Spacing = 10mm

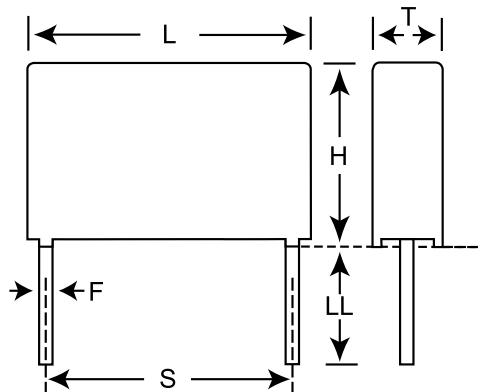

**Dimensions**

L	13mm +0.3mm
H	12mm +0.1mm
T	6mm +0.2mm
S	10mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

**Packaging Specifications**

<b>Packaging:</b>	Bulk, Box
-------------------	-----------

**General Information**

<b>Supplier:</b>	KEMET
<b>Series:</b>	R75L
<b>Dielectric:</b>	Metallized Polypropylene
<b>Style:</b>	Radial
<b>Features:</b>	Pulse, Capacitive Power Supply
<b>RoHS:</b>	Yes
<b>Lead:</b>	Wire Leads

**Specifications**

<b>Capacitance:</b>	0.068 $\mu$ F
<b>Capacitance Tolerance:</b>	10%
<b>Voltage AC:</b>	250 VAC
<b>Voltage DC:</b>	560 VDC, 336 VDC (105C)
<b>Temperature Range:</b>	-55/+105C
<b>Rated Temperature:</b>	85C
<b>Dissipation Factor:</b>	4% 1kHz, 6% 10kHz, 25% 100kHz
<b>Insulation Resistance:</b>	440 GOhms
<b>Max dV/dt:</b>	1500 V/us
<b>Inductance:</b>	10 nH