
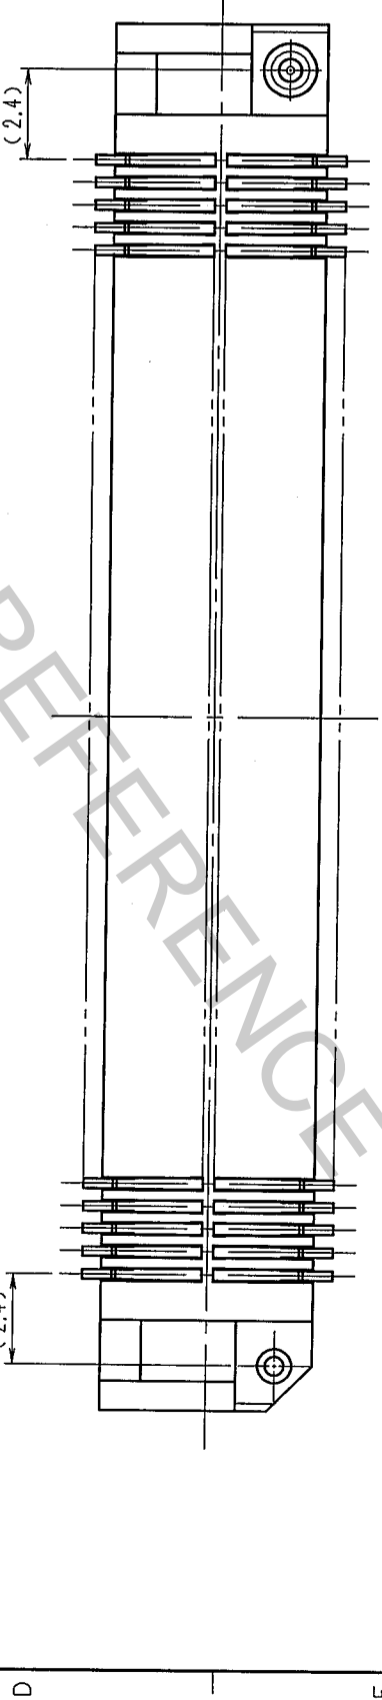
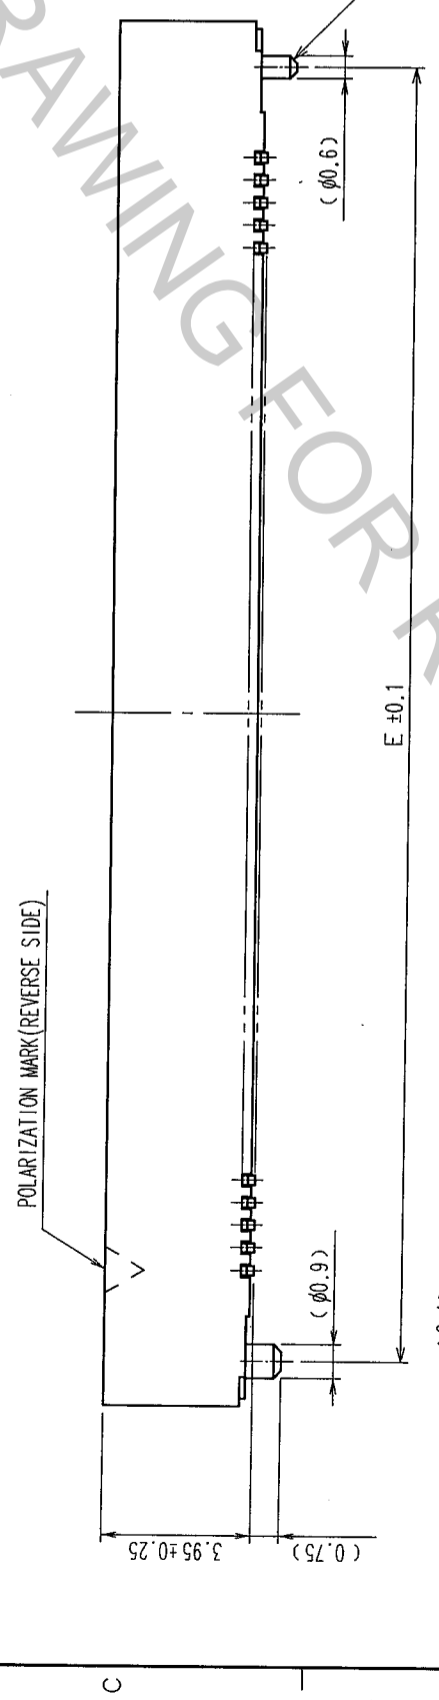


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

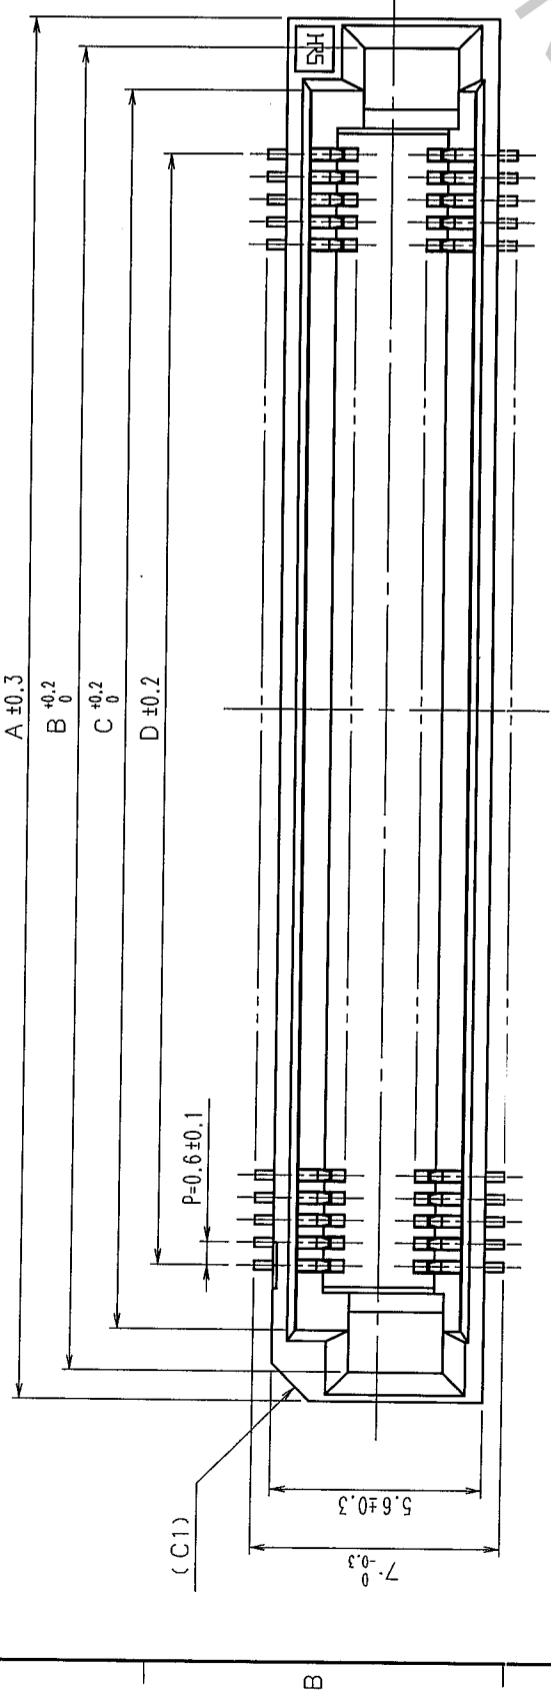



CL No.	PART No.	A	B	C	D	E
CL578-0801-2-91	FX8C-60S-SV(91)	24.6	23.05	20.8	17.4	22.2
CL578-0803-8-91	FX8C-80S-SV(91)	30.6	29.05	26.8	23.4	28.2
CL578-0805-3-91	FX8C-100S-SV(91)	36.6	35.05	32.8	29.4	34.2
CL578-0806-6-91	FX8C-120S-SV(91)	42.6	41.05	38.8	35.4	40.2
CL578-0807-9-91	FX8C-140S-SV(91)	48.6	47.05	44.8	41.4	46.2

1	POLYPHENYLENE SULFIDE	LIGHT BROWN	UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. MOUNTING AREA : GOLD FLASH
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	UNDER PLATING : NICKEL 1.5μm min.
CODE NO. (OLD)		CODE NO.		FINISH, REMARKS		
DRAWING NO.		PART NO.		APPROVED		
EDC3-151022-21		FX8C-※S-SV(91)		RELEASED		
SCALE		DRAWN		CHECKED		
5 : 1		T. Noda		H. Okawa		
UNITS		'05.03.16		'05.03.16		
mm						
HIROSE ELECTRIC CO., LTD		CODE NO.		CL578		
HRS						

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.1 mm MAX.  
 2 FOR DETAILS, SEE THE SECTION CONCERNING THE DELIVERY FORM ON NEXT PAGE.  
 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.  
 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO	
PCK	

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

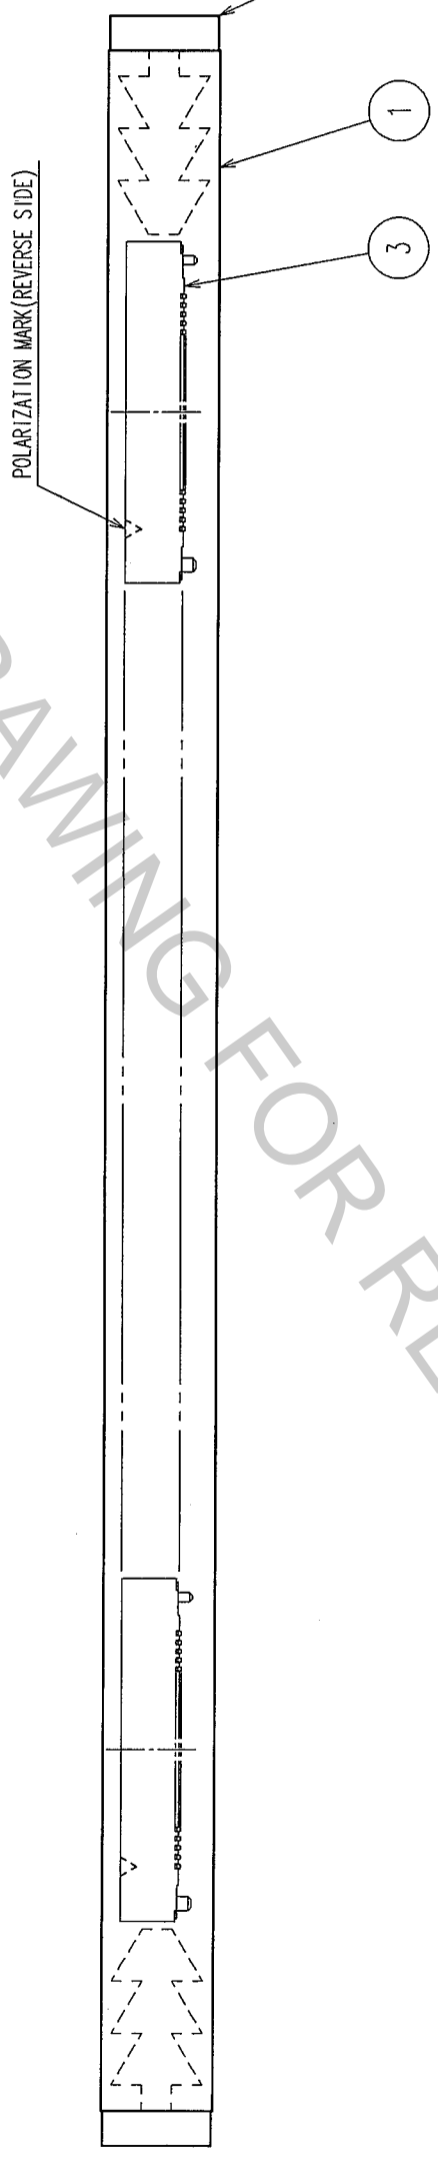

DELIVERY FORM(TUBE PACKAGING)

NUMBER OF CONTACTS (CONTACTS)	60	80	100	120	140
PRODUCT CONTENT(PCS)	21	17	14	12	10

NOTE. THE DIMENSIONS IN PARENTHESES ARE FOR PREFERENCE.

NO.	MATERIAL	FINISH, REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
2	POLYVINYL CHLORIDE	STOPPER					
1	POLYVINYL CHLORIDE	TUBE					
3	(CONNECTOR)						
CODE NO. (OLD)			T. Noda	K. Doi	H. Okawa	H. Okawa	
			'05.03.16	'05.03.16	'05.03.16	'05.03.16	
DRAWING NO.			PART NO.				
EDC3-151022-21			FX8C-S-SV(91)				
SCALE			CODE NO.				
FREE			CL578				
UNITS			HIROSE ELECTRIC CO., LTD				
			HRS				

TO	
PCK	