

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION				
		<i>K. Ozono</i>		P/N: LN1371GTRP			

T Y P E	Green Light Emitting Diode					
A P P L I C A T I O N	Indicators					
M A T E R I A L	GaP					
O U T L I N E	Attached					
A B S O L U T E M A X I M U M R A T I N G S	P	※ I <sub>FP</sub>	I <sub>FDC</sub>	V <sub>R</sub>	Topr	Tstg
	60	60	20	4	-25~+85	-30~+100
	mW	mA	mA	V	°C	°C
C O N D I T I O N	T <sub>a</sub> = 25 ± 3 °C					


Test Specification

Item	Symbol	Condition	Typ	Limit		Unit
				Min	Max	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	2.03		2.6	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 4 V			10	μA
Luminous Intensity	I <sub>O</sub>	I <sub>F</sub> = 10 mA · DC	2.6	0.9		mcd
Peak Emission Wavelength	λ <sub>p</sub>	I <sub>F</sub> = 10 mA · DC	565			nm
Spectral Line Half Width	Δλ	I <sub>F</sub> = 10 mA · DC	30			nm

- ※ · The Condition of I<sub>FP</sub> is duty 10 %, Pulse width 1 ms
- Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.





NOTE

1. Compositions of the lead ... Cu/Ni/Au plating
2. Soldering conditions.  
Refer to Handling note.
3. Care should be taken that soldering is done within 3-days after opening the dry package and reel.
4. Package: Light green diffusion type.
5. Circuit to operate LED.

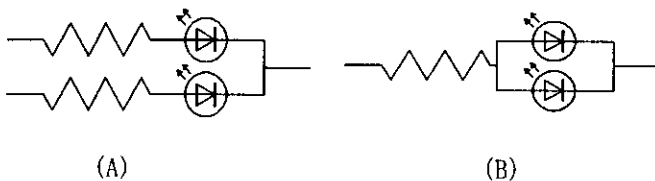

- (A) Recommended circuit.  
 (B) The difference of brightness between the LED could be found due to the V<sub>F</sub> characteristics of each LED.


Oct. 27. 2001			

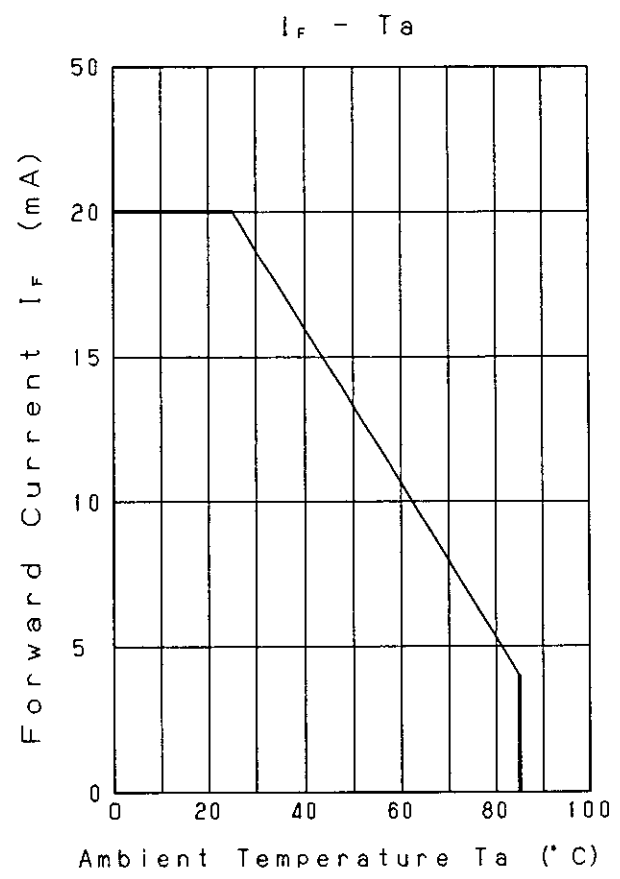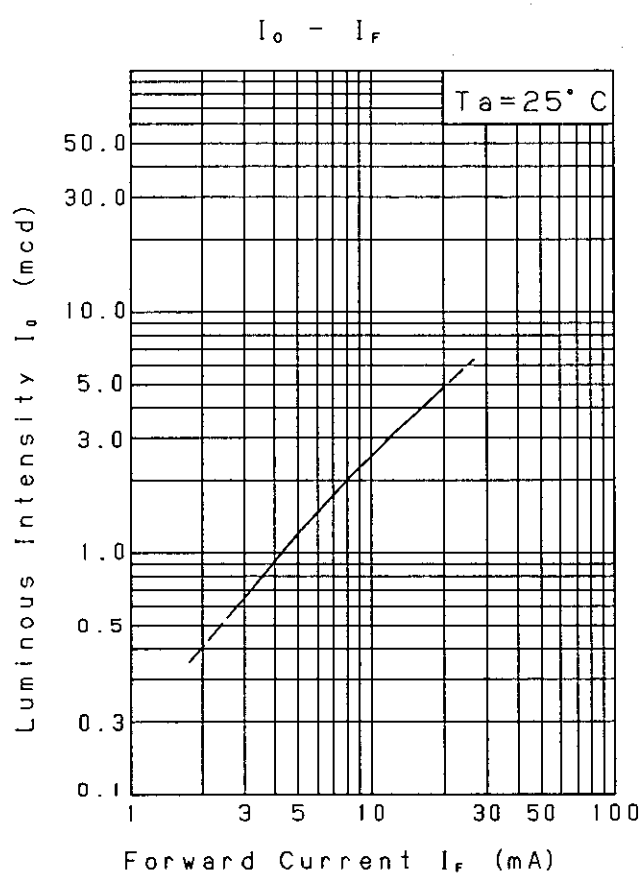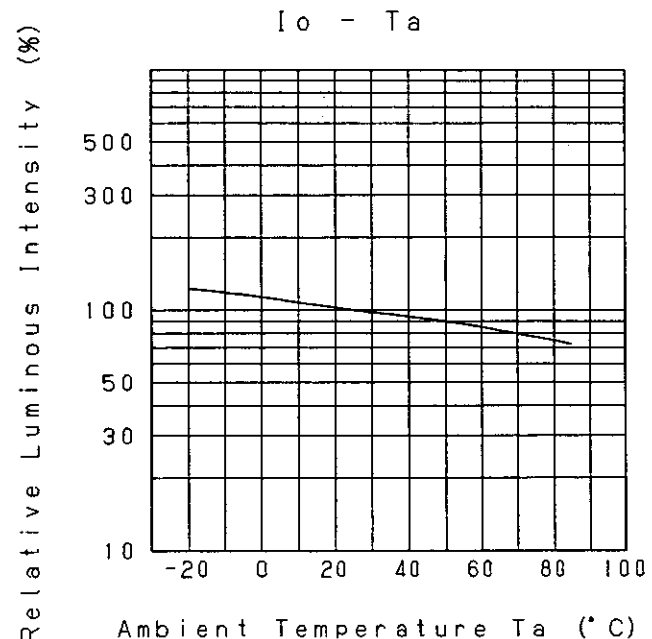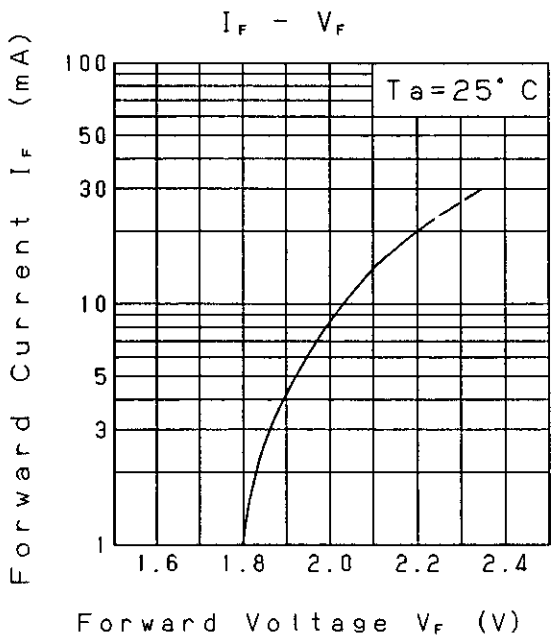


*K. Oshiro*

P/N: LN1371GTRP

Relative Luminous Intensity  
Wavelength Characteristics

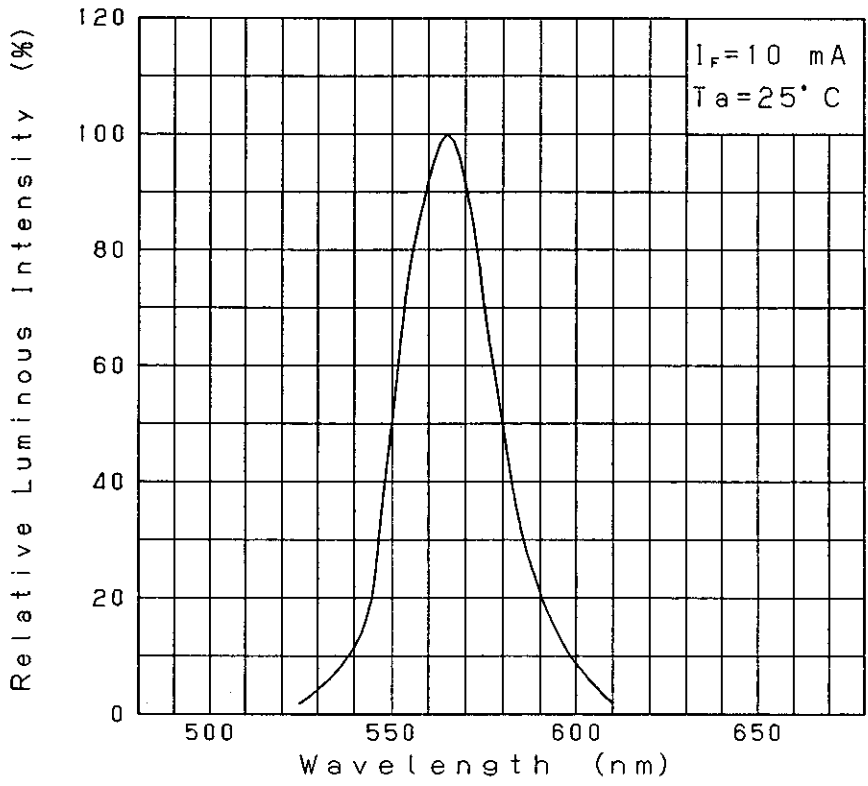

Directive Characteristics




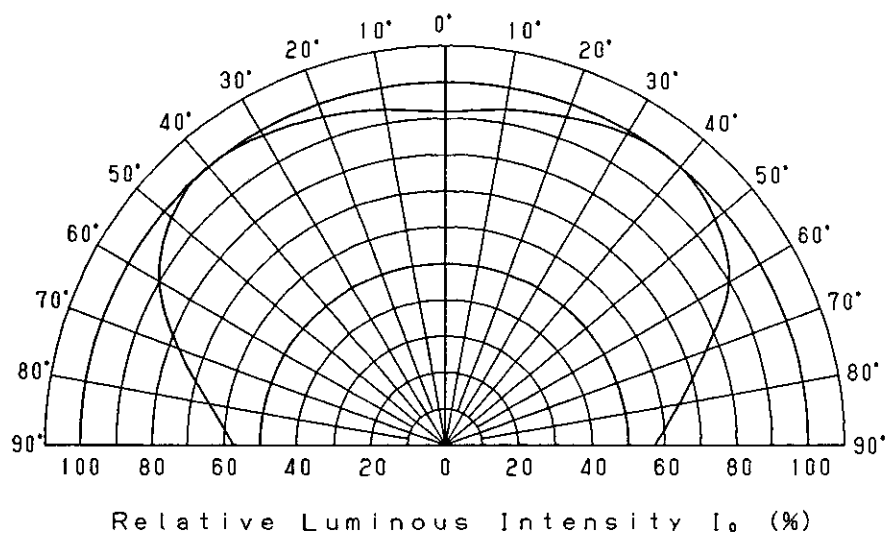


Oct. 27. 2001

Approved	Checked	Designed
		<i>K. Osumi</i>

DEVELOPMENT SPECIFICATION  
(OUTLINE)

P/N: LN1371GTRP

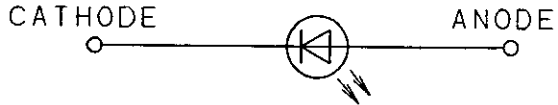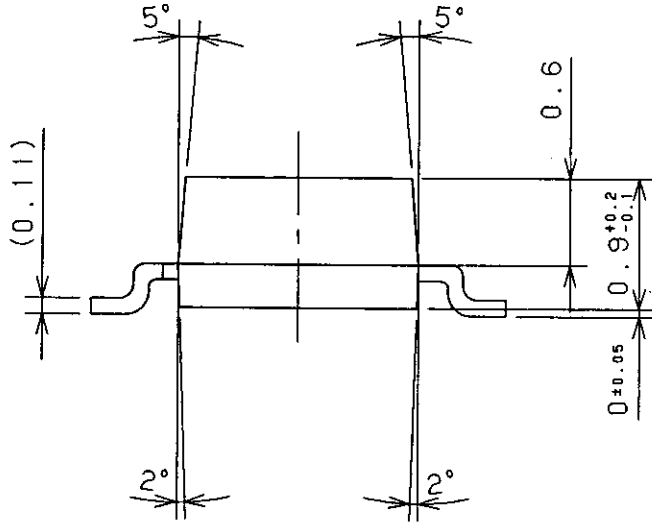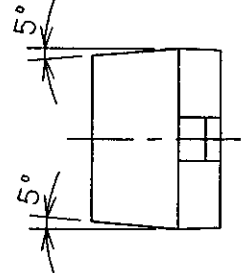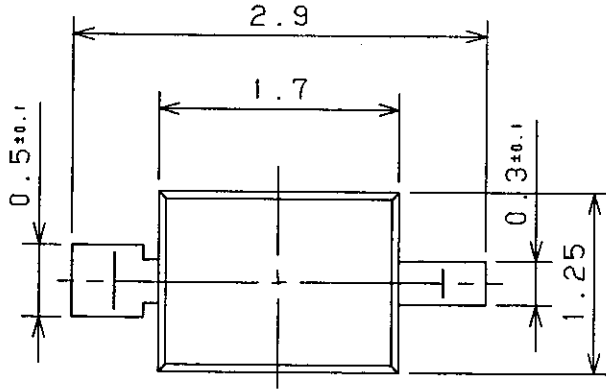

- (NOTE)
1. Unit: mm
  2. Tolerance unless specified is ±0.2.
  3. Measurement of the Package doesn't include gete projection.
  4. Corner of the package is R 0.2max.
  5. Projection's tolerance of the package is R 0.2max.

Oct. 27. 2001