



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---------------------------|------|-----|------|
| 11/12/05 | A | ADDED "ROHS COMPLIANT" | T.B. | | B.S. |
| 3/18/06 | B | UPDATED MATERIAL SPEC. | T.B. | | B.S. |
| 5/06/06 | C | ADDED CONTACT RESI. INFO. | T.B. | | B.S. |
| | | | | | |
| | | | | | |

ORDERING CODE BH2C

L-Solder Lugs
 W-(6") Wire Leads
 SF-9Volt type snaps
 B- Bump plates

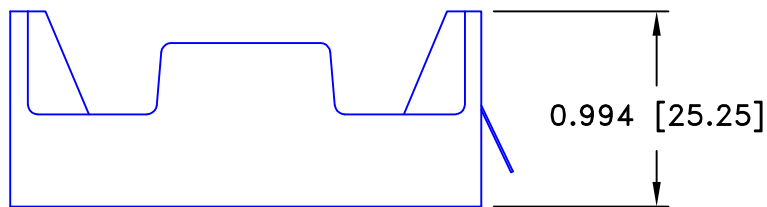


Solder Lugs shown

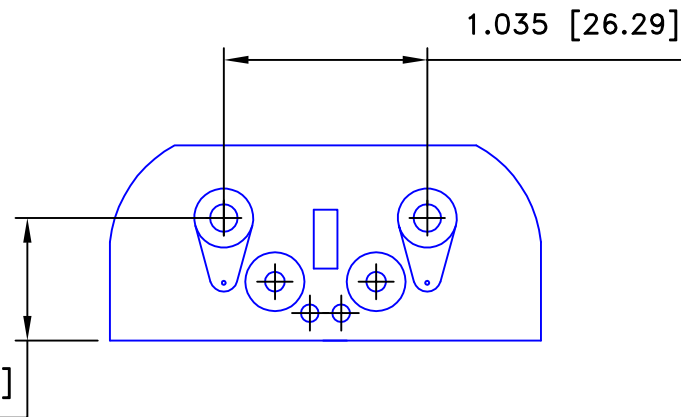

SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA
 Rivets - Brass, Nickel Plated
 9Volt Snaps - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000

ROHS COMPLIANT

| | | | |
|--------------------------------|--|-------------------------|------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale 1=1 | Drawn By T.S. |
| | | | Approved By T.B. |
| decimal ±.5 (.020) | Title TWO "C" CELL HOLDER | | |
| Fractional ± .8 (.030) | Date 5/06/06 | Drawing Number BH2CL | |