



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
AF	50			ZONE	LTR	DESCRIPTION	DATE	APPD
					E	REVISED PER 0232-93	8/4/93	PF/NN



- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.08 [.200] CENTERS
- △2 SLOT ACCEPTS 0.25-0.32mm [#30-#28]AWG COPPER MAGNET WIRE
- △3 TIN LEAD 0.00380 [.000150] MIN PER MIL-T-10727 OVER NICKEL 0.00127 [.000050] MIN PER QQ-N-290.

IDENTIFICATION NUMBER FOR MAGNET WIRE RANGE

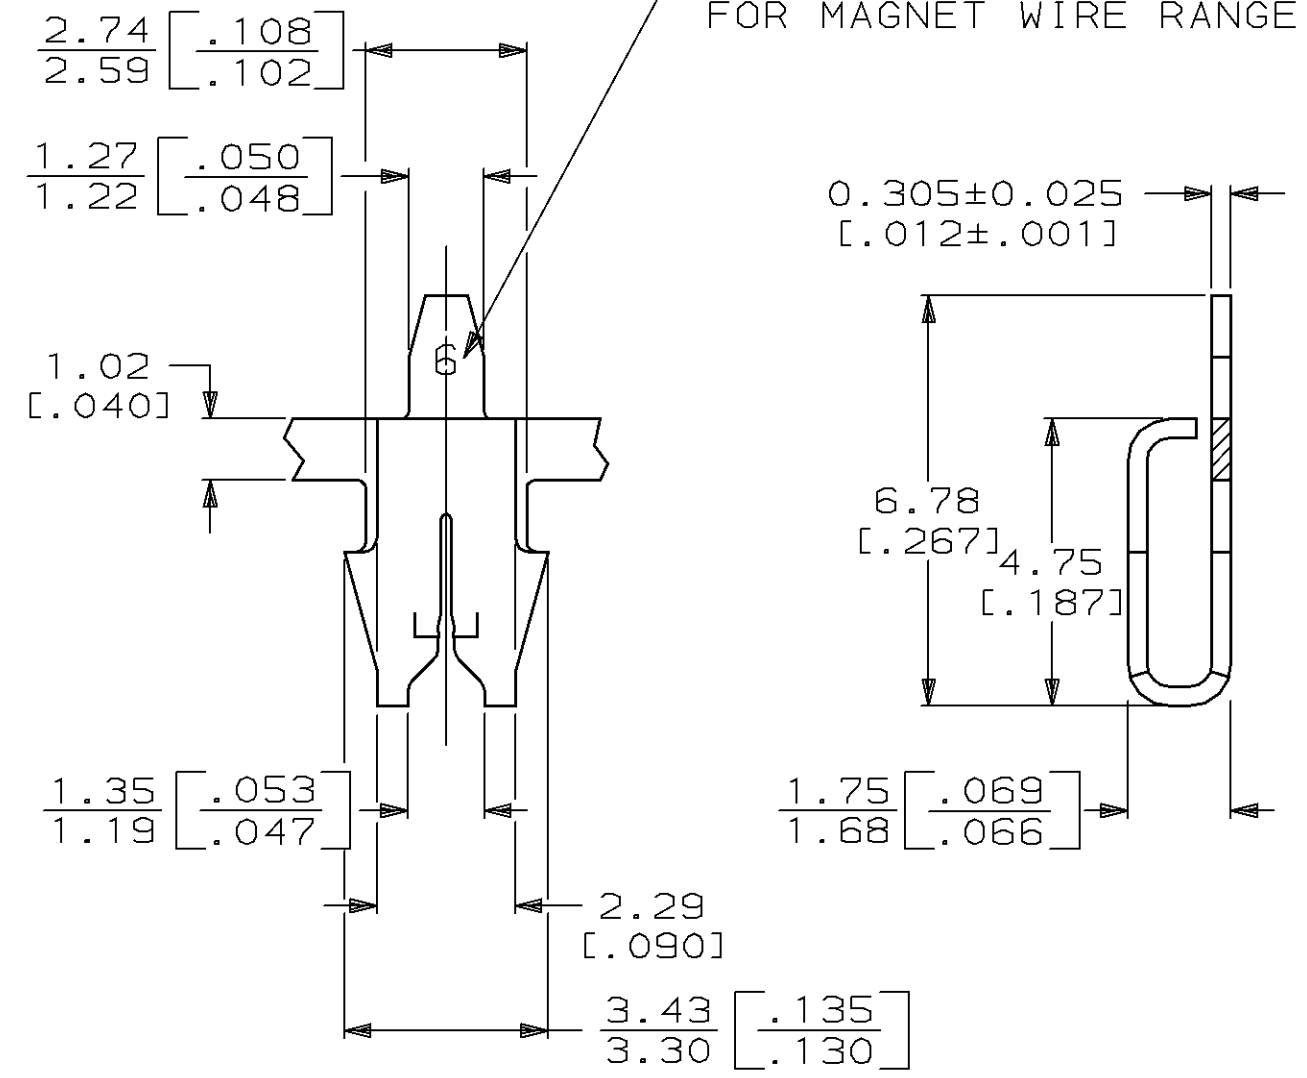

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:		DR 7/10/90 M.S. FEHER	63160-1	
2 PLC DEC ± 0.25 [.010]		CHK 7/20/90 J.R. RUTH	PART NO	
3 PLC DEC ± -		APPD 7/20/90 N.E. NEFF	AMP INCORPORATED Harrisburg, Pa. 17105	
ANGLES ± -		APPD 7/20/90 T.L. SHUTTER	NAME	
MATERIAL	#4 HARD BRASS	PRODUCT SPEC 108-2012	TERMINAL, TAB, MAG-MATE™	
FINISH	△3	APPLICATION SPEC 114-2069	SIZE B	CAGE CODE 00779
		WEIGHT -	SCALE 8:1	DRAWING NO 63160
			SHEET	1 OF 1