

SERIES EG1390 SWITCHES



E-SWITCH™

SLIDE SWITCHES



FEATURES & BENEFITS

Tape & Reel Packaging
2-position
Surface Mount
Sub-miniature

APPLICATIONS / MARKETS

Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf in both directions
Travel:	1.5 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +70°C

HOW TO ORDER:

SERIES


EG

MODEL





1390

ACTUATOR


A = 1.0mm
B = 2.0mm



SCHEMATIC

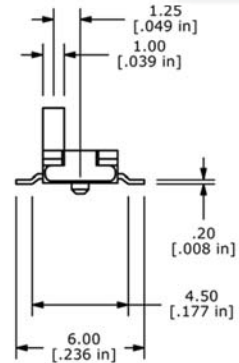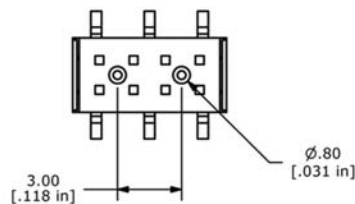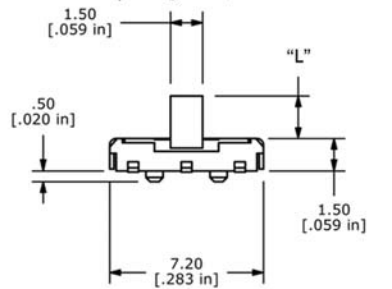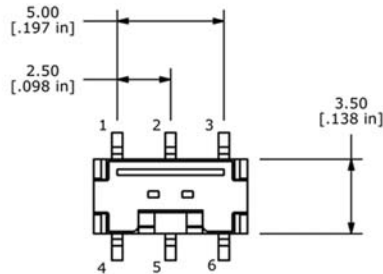

Model	"L" Dimension
1390 A	1.00 mm
1390 B	2.00 mm

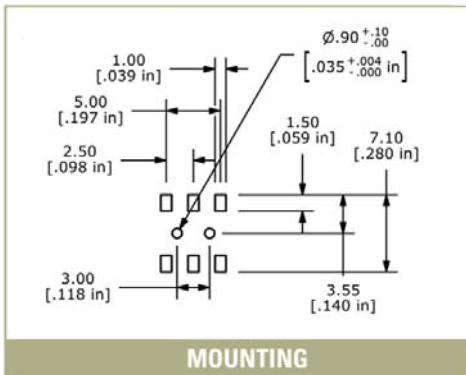

MOUNTING