

FG20C0G2E473JNT00




Application

Commercial Grade

Series

FG20

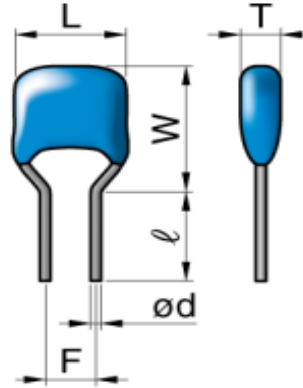

Dimensions

L 5.5mm Max.
 W 7mm Max.
 T 4mm Max.
 F 5mm +/-1mm
 d 0.5mm +0.1,-0.03mm
 l 7mm +/-2mm

Temperature Characteristic

-55 to 125°C 0+/-30ppm/°C

Rated Voltage

250Vdc

Capacitance

47nF

Capacitance Tolerance

+/-5%

Q Factor





1000 Min.

Insulation Resistance

10000Mohm Min.

AEC-Q200

No

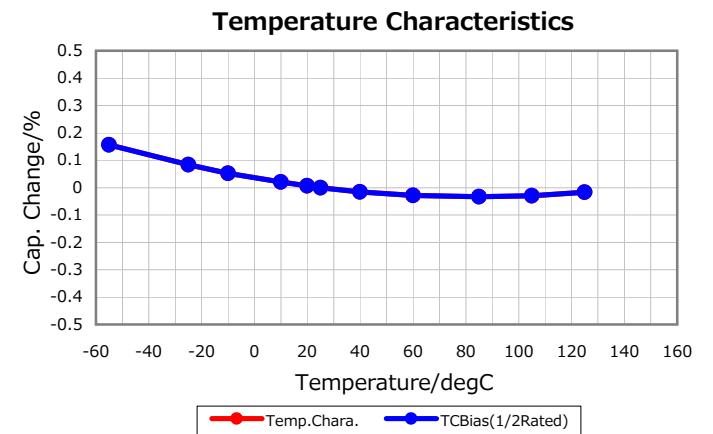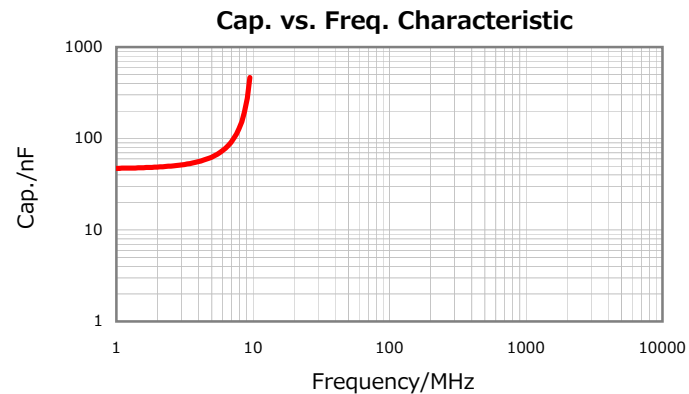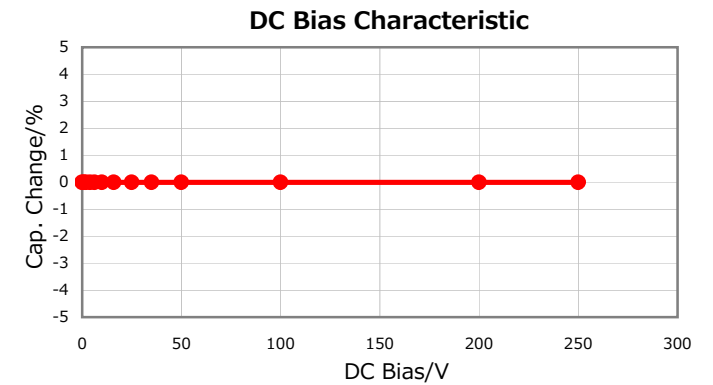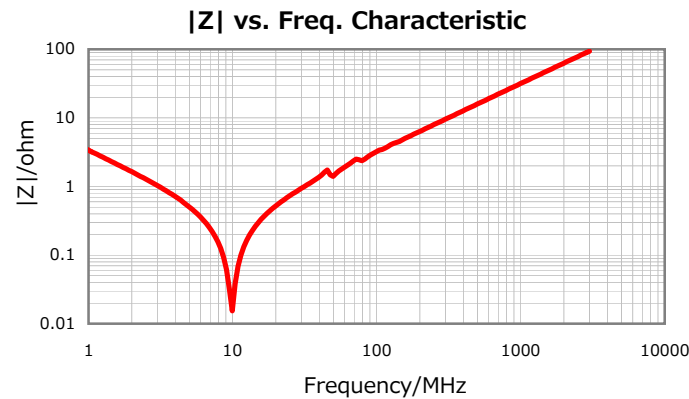

Characterization Sheet (MLCC with Dipped Radial Lead)



All specifications are subject to change without notice.

December 28, 2015