

Technical specification:

Rated voltage: IEC 61076-2-101	4pos 250 V
Current rating: IEC 61076-2-101	4 A at 40°C
Insulation resistance: IEC 60512	>=100 MΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 65, in mated condition
Temperature range: IEC 60664-1	+100°C - 30.000 h +125°C - 8.000 h +150°C - 2.000 h
Mating cycles: IEC 60512-9a	>=100

Materials:


Contact:	CuZn, CuBe
Contact plating:	Nickel, gold plated
Contact carrier:	PBT GF, UL 94
Sealing:	FPM
Coupling nut/ screw:	CuZn, nickel plated
Moulding body:	Thermoplastic elastomere, grey

Installation specification:

Recommended torque:	0,6 Nm
---------------------	--------

Contact assignment:

- 1) brown
- 2) white
- 3) blue
- 4) black

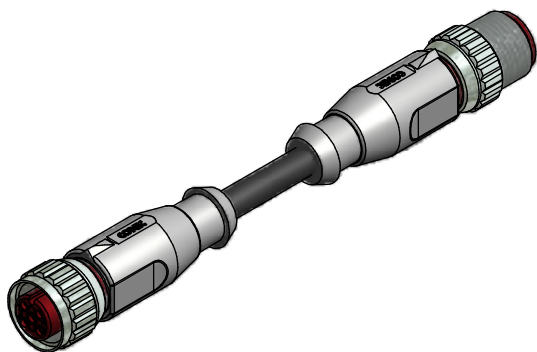

Part no:	Description:	Length L:	Cable:
43-10900	SAL - HT - 12 - RK4 - RS4 - 0,3 / S1	0,3m	TPE, black, 4x0,34mm ² Cable: 781-S13400
43-10901	SAL - HT - 12 - RK4 - RS4 - 0,6 / S1	0,6m	
43-10902	SAL - HT - 12 - RK4 - RS4 - 1,5 / S1	1,5m	
43-10903	SAL - HT - 12 - RK4 - RS4 - 3 / S1	3m	
43-xxxxx	SAL - HT - 12 - RK4 - RS4 - ... / S1	x	

D see data sheet cable

DO NOT ALTER CAD DRAWING BY HAND	Directive 2002/95/EC RoHS compliant	Index: b 14.02.2011 VF Ä3909 technical specification changed, part no. cable in table added, data sheet modified	dim. in mm	title: Connecting cable M12x1, HT, female connector axial - male connector axial												
		tolerance of cable: L ≤ 4m: L + 40mm L > 4m: L + 1%														
		THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	<table border="1"> <tr> <td></td> <td>date</td> <td>name</td> </tr> <tr> <td>drawn</td> <td>08.03.07</td> <td>Fromm</td> </tr> <tr> <td>appd.</td> <td>08.03.07</td> <td>Mankopf</td> </tr> </table>			date	name	drawn	08.03.07	Fromm	appd.	08.03.07	Mankopf		dwg no: 43K1A414	
					date	name										
drawn	08.03.07	Fromm														
appd.	08.03.07	Mankopf														
			part no: see table													