

5




4

3


2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

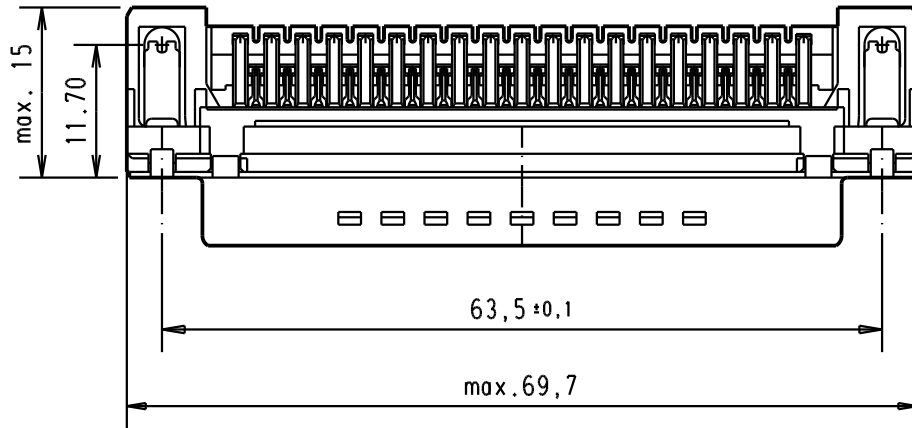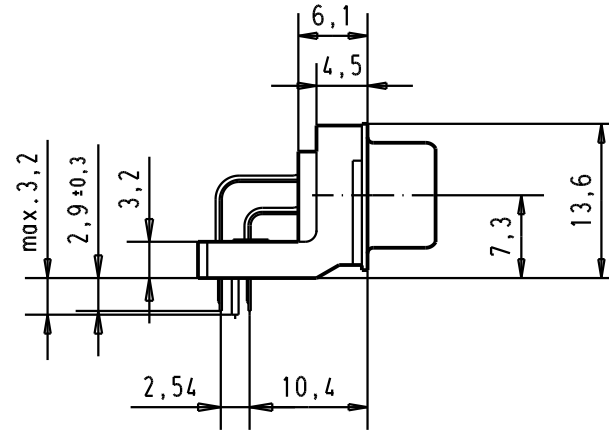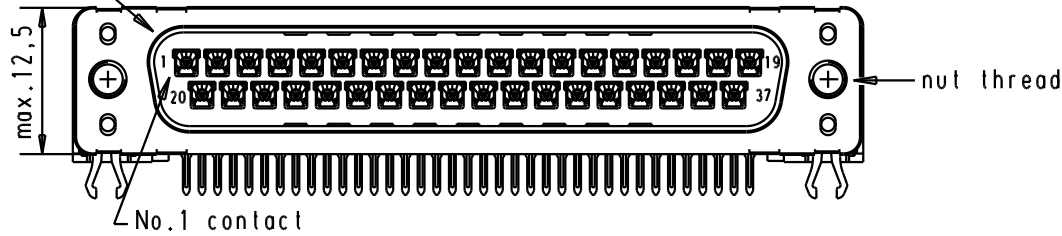

PCB layout hole component side

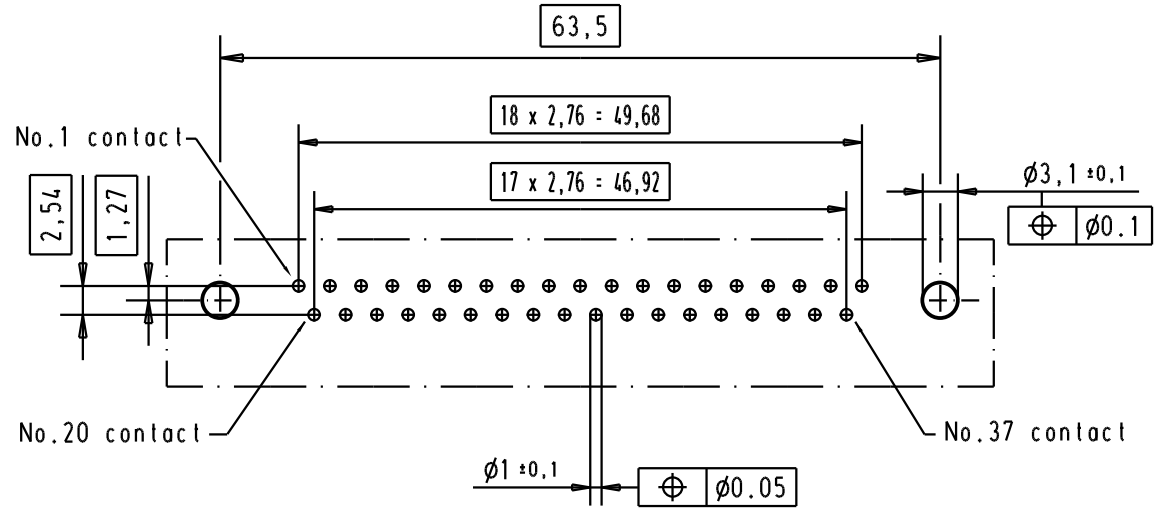

Connector retention and insertion forces on the PCB = 25 / 80 newtons

Part number	Nut thread	Performance level	Mod.	Dat.	Name	Dat.	Name	All Dim. in mm Orig. Size DIN A 4		Moßstab/ Scale											
09 65 462 3811	M3	1							D-Sub, male, standard angle, 37 poles, with solder pin, nut and grounding board lock.	1.5:1											
09 65 462 6811	M3	2				Detail.	15/dec/00				ALSPACE										
09 65 462 7811	M3	3	31892	22/04/04	JH	Insp.															
09 65 462 3812	4-40 UNC	1	31084	04/09/02	YT	Stand.															
09 65 462 6812	4-40 UNC	2	29689	03/07/01	AA																
09 65 462 7812	4-40 UNC	3	27960	15/dec/00	ALSPACE																
Part number						Nut thread		Performance level		Mod.		Dat.		Name				TB 0965462x81x		Blatt/ Page 5	

HARTING EURL
F-95972 Paris



Sub.