


1. Wiring Diagram.

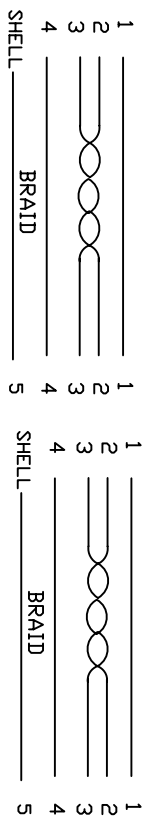

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec
- 3. Each pcs with PE polybag.

9	BRACKET	BRACKET W/2*USB NICKEL PLATED	1	
8	SCREW	#4-40UNC 2.8*14.1 NICKEL PLATED	4	
7	NUT	HEX NUT #4-40UNC 4.75*1.75 NICKEL PLATED	4	
6	TER.	PH2.54 TER. BRASS G/F CRIMP TYPE	10	
5	HSG	DUPON PH2.54 HOUSING 1*5P BLACK	2	P2,P4
4	PVC	45P PVC BLACK OVERMOLD	50g	
3	PE	LLDPE 500026 6201 INSIDE MOLDING	16g	
2	CONN	USB A TYPE FEMALE PIN G/F ,SHELL PLATED G/F, INSULATION WHITE	2	P1,P3
1	CABLE	USB2.0 UL2725 28AWG*1P+24WG*2C AL+B+D (16/4/0.12AL) OD4.5 BLACK	2	250MM
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF

BILL OF MATERIAL

A	INITIAL RELEASE	2016/08/25
REVECN#	DESCRIPTION	DATE
Cnc Tech, LLC		
DRAWN	DATE	TITLE
EDWIN LAI	08/25/16	USB2.0 A/F 2 PORT CABLE
CHECKED	DATE	DWN NO.
W. IN. C	08/25/16	102-1050-BL-00025
APPROVAL	CUSTOMER P/N:	REV
		A
SHEET 1 OF 1		