



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	LENGTH +/- .3" [7]
MLT4DEH15-Q	4" [102]	25	29.5" [749]
MLT6DEH15-Q	6" [152]	25	41.5" [1054]
MLT8DEH15-Q	8" [203]	25	53.5" [1359]

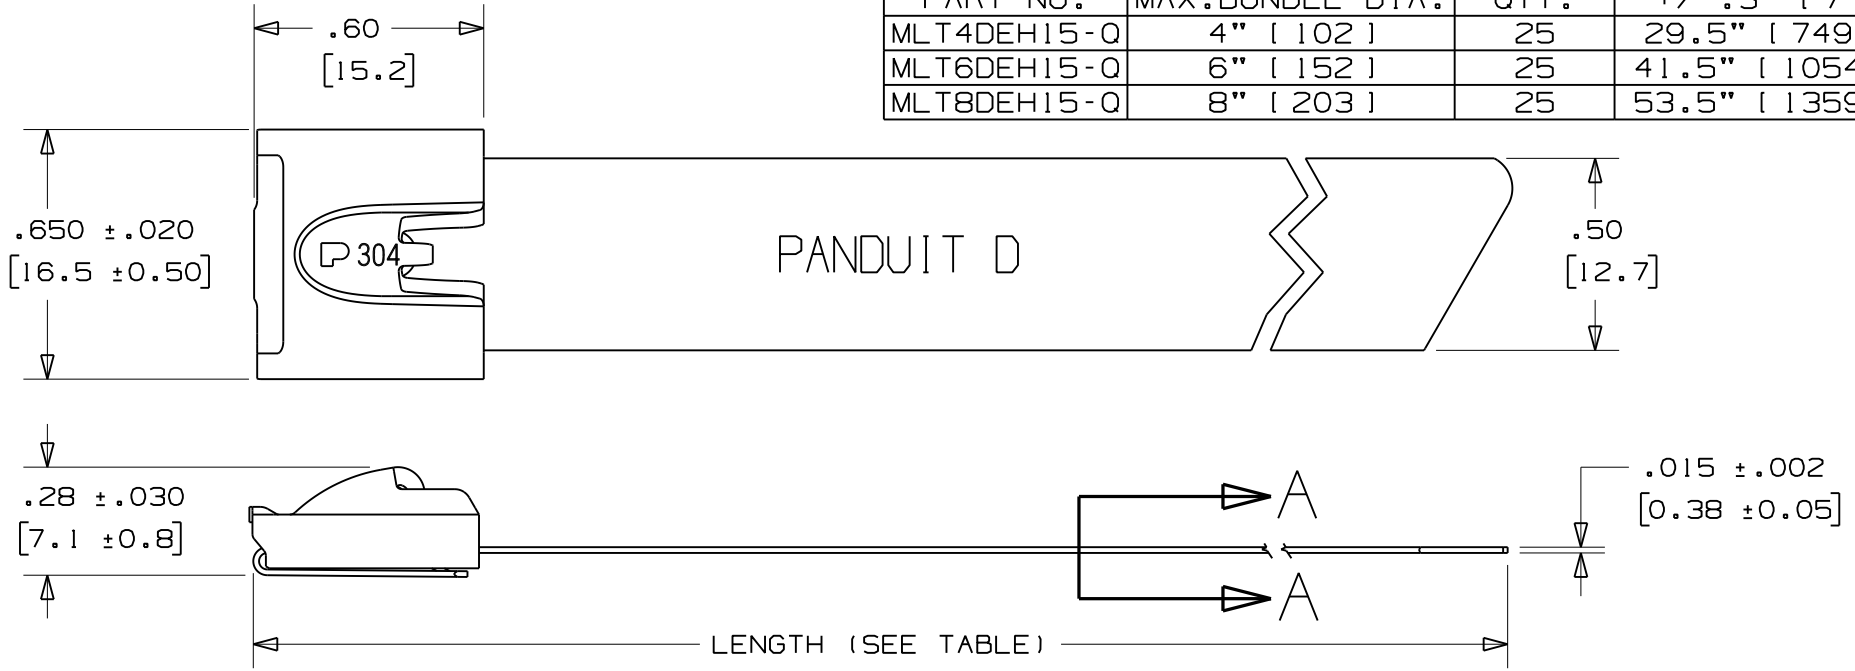

NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 1000 LBS. (4450 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 - .XXX = ±.010 [.25]
 - .XX = ±.02 [.5]
 - .X = ±.03 [.8]
 - ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

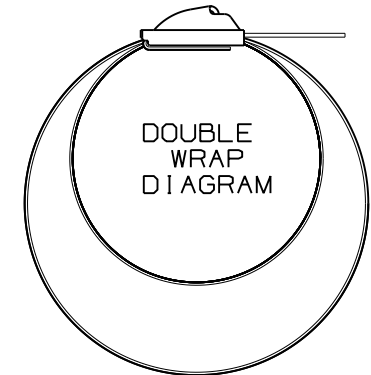

BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)

N41161BS_DC/01A

SECTION A - A
SCALE: 4x

				TINLEY PARK, ILLINOIS									
01A	10/08	JAMB	SKB				ORIG CAD FILE SPEC WAS S41161_01 NOTE 1: APPLICATION TOOL RT1HT REPLACED BY RT2HT						
01	8/04	JAMB	DPN	(A) REMOVED "AISI NO.5"			11907	CCH	JJB	METAL LOCKING TIE EXTRA HEAVY DUTY 304 STAINLESS STEEL-DOUBLE WRAP CUSTOMER DRAWING			
00	1/04	JAMB	DPN	RELEASED			11307	CCH	JJB				
REV	DATE	BY	CHK	DESCRIPTION			ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.
										JAMB	DPN	2x	N41161BS_DC