


MODEL:

# PDUMH32HVATNET

## Single-Phase Switched 2U Rackmount ATS PDU



230V Single-Phase Input/Output



Automatic Transfer Switch




18 Outlets



7.4kW Load Capacity



Multi-function Display



Network Interface



2U Horizontal Rackmount





2 IEC-309 Blue 32A Inputs

- A** 20A Double Pole Magnetic Circuit Breakers
- B** Multi-Function Display
- C** Factory Configuration Port
- D** Network Interface
- E** Removable Rackmounting Brackets
- F** Removable Cord Retention Brackets
- G** 10 ft. Input Power Cord (x2)
- H** IEC-309 Blue 32A (2P+E) Input Plug (x2)
- I** Grounding Lug
- J** C13 and C19 Outlets

Also Includes: Owner's manual, configuration cable and cable ties.

Multi-function display reports Current, Voltage, Kilowatts and Temperature/Humidity\*, plus Source A/B Available and In-Use Status.

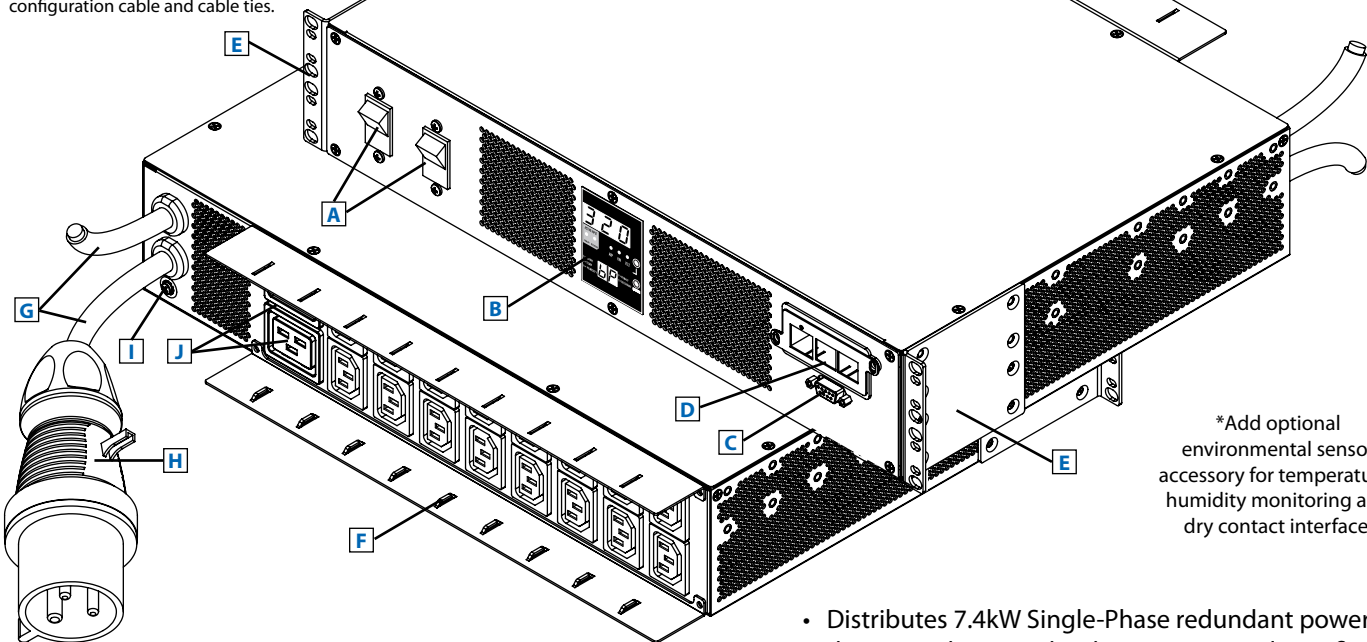

\*Add optional environmental sensor accessory for temperature/humidity monitoring and dry contact interface.

- Distributes 7.4kW Single-Phase redundant power for devices with non-redundant power supply configurations
- Real-time load current display with billing-grade accuracy (+/-1%)
- Ideal for data centers and server rooms
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**




1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

### Specifications


<b>Model</b>	PDUMH32HVATNET
<b>Voltage</b>	230V (Single-Phase Input/Output)
<b>Frequency</b>	50 / 60 Hz
<b>Load Capacity</b>	7.4kW
<b>Input Plugs</b>	IEC-309 Blue 32A (2P+E)
<b>Input Cord Lengths</b>	10 ft. (3 m)
<b>Outlets</b>	18 (16 C13 / 2 C19)
<b>Primary Mounting Option</b>	2U Horizontal
<b>Unit Weight &amp; Dimensions</b>	13.7 lb / 3.5 x 17.5 x 12.5 (HxWxD in inches) 6.2 kg / 88 x 444 x 317 (HxWxD in mm)
<b>Standards</b>	See next page for detailed unit measurements. Tested to EN/IEC 60950-1, NOM (Mexico), EN Class A (Emissions), RoHS; TAA Compliant

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.




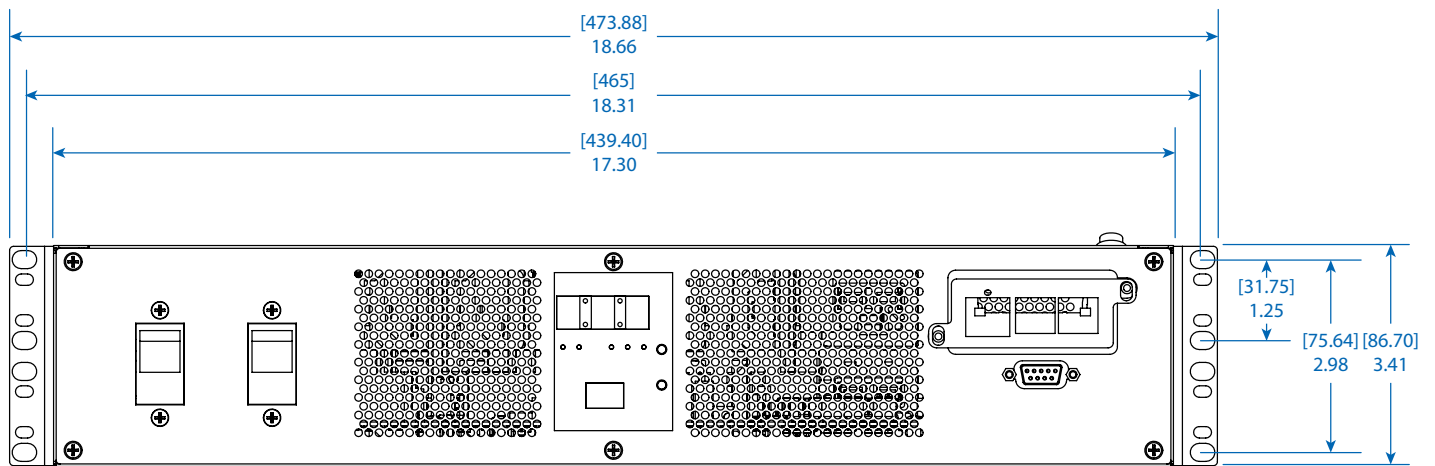

FRONT VIEW

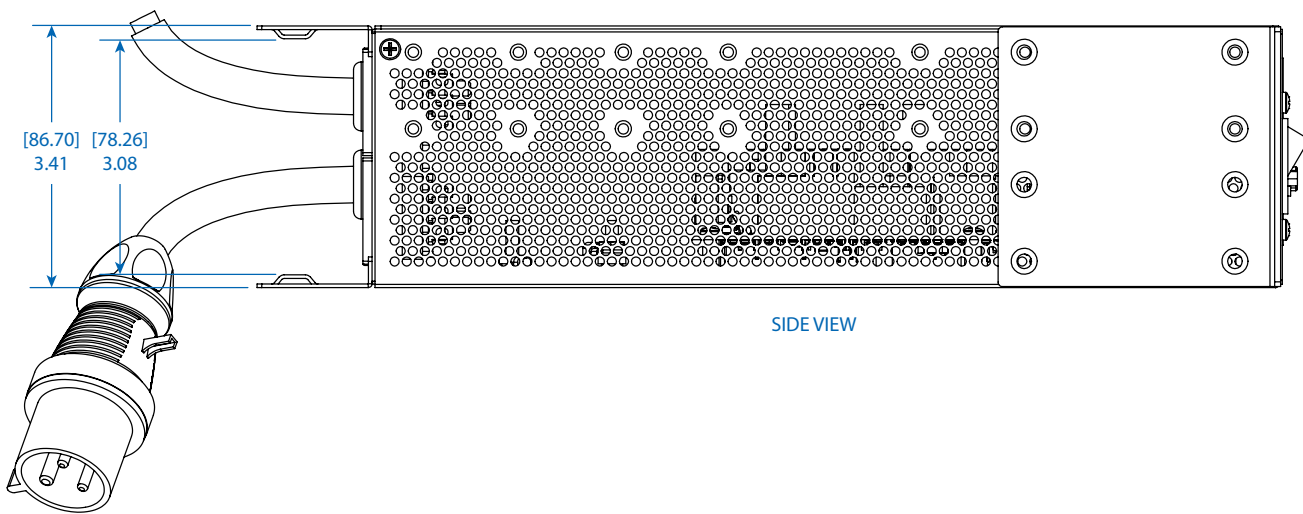

SIDE VIEW

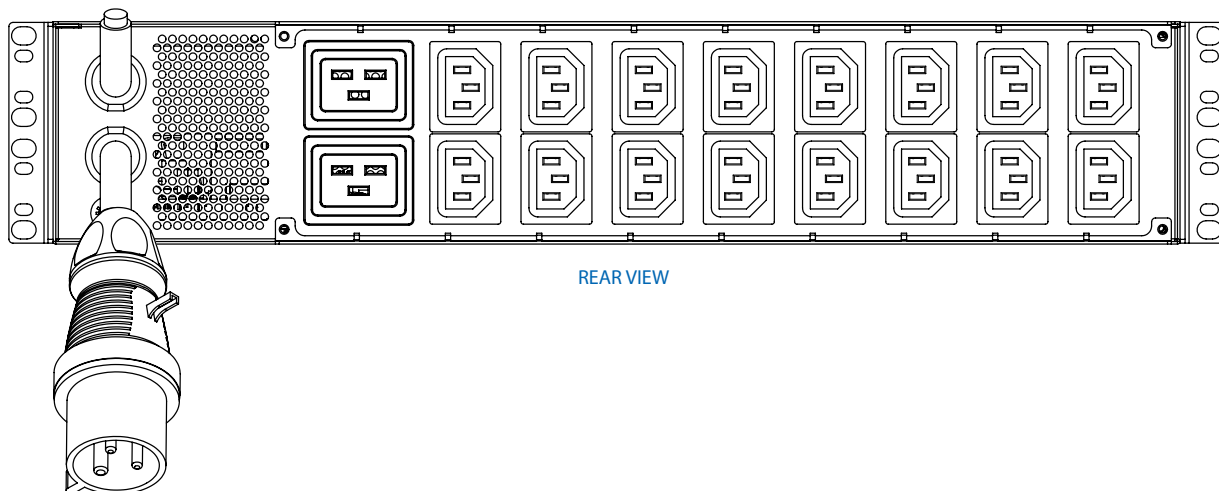

REAR VIEW

Dimensions: [mm] INCHES


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**PDUMH32HVATNET**

**TRIPP-LITE**

1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234

[www.tripplite.com](http://www.tripplite.com)

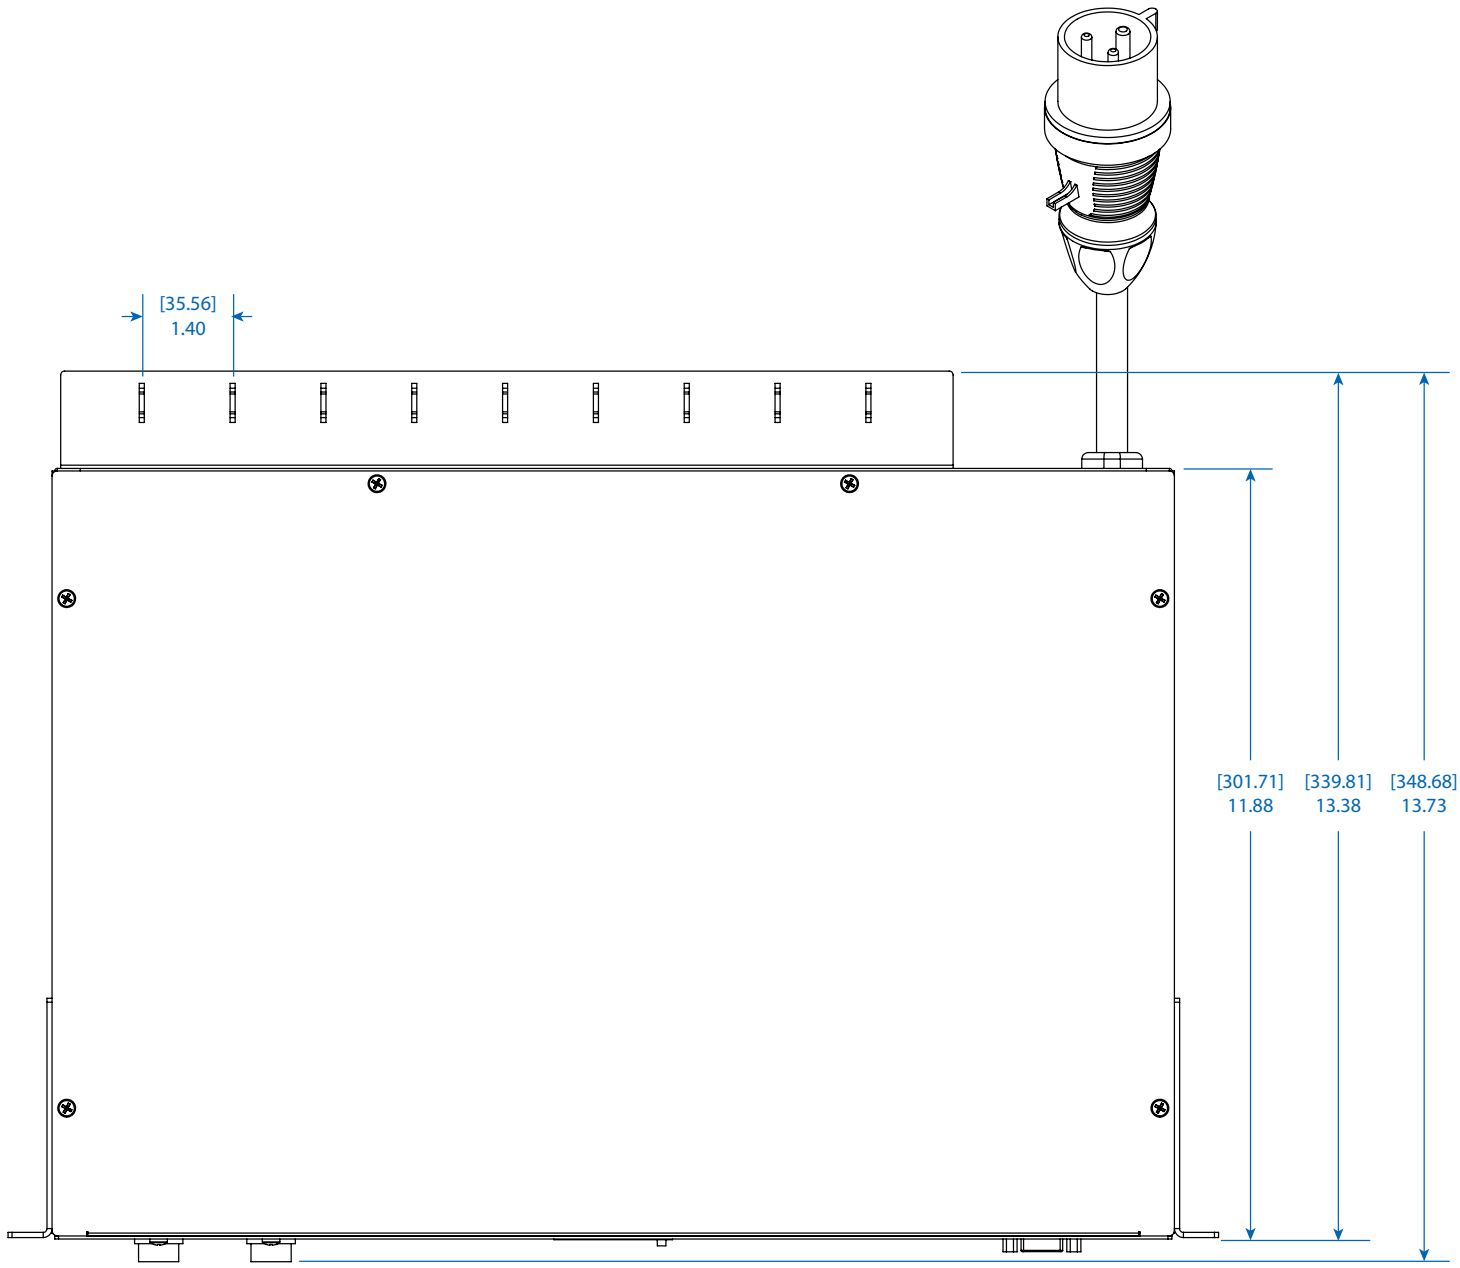

TOP VIEW

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**PDUMH32HVATNET**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
[www.tripplite.com](http://www.tripplite.com)