


插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剥(Strip)	外剥(Roj)	顏色(Color)		外剥(Roj)	內剥(Strip)	顏色(Color)	零件描述(Component)	顏色(Color)	數量(Q'ty)
35P透明 90±2A Clear	FM-2 (15A 125V~) (NEMA5-15P)	1	10±1	60±2	黑/Black(L)	SJT 14AWG/3C	15±1	5 ⁺¹ ₋₀	黑/Black(L)	ME-302 (15A 125V~) (IEC 320 C13)	35P透明 90±2A Clear	1
鍍鎳 Nickel-Plated	□4.75 U型圓管	1	10±1	60±2	白/White(N)	105°C 灰色(Gray)	15±1	5 ⁺¹ ₋₀	白/White(N)	電腦電源線端子 (Computer power cord terminals)	銅本色(Copper)	3
鍍鎳 Nickel-Plated	6.3*1.5 單片圓頭端子 (Solid Blades)	2	20±1	75±2	綠/Green(E)	線長: (Length) 1866.9 ^{+50.8} _{-12.7}	15±1	5 ⁺¹ ₋₀	綠/Green(E)	302兩件式內模 (302 Inner Body)	白色(White)	1
鍍鎳 Nickel-Plated	墊片 (Gasket)	3										



插頭端面圖
(Dimensions of Plug Face)

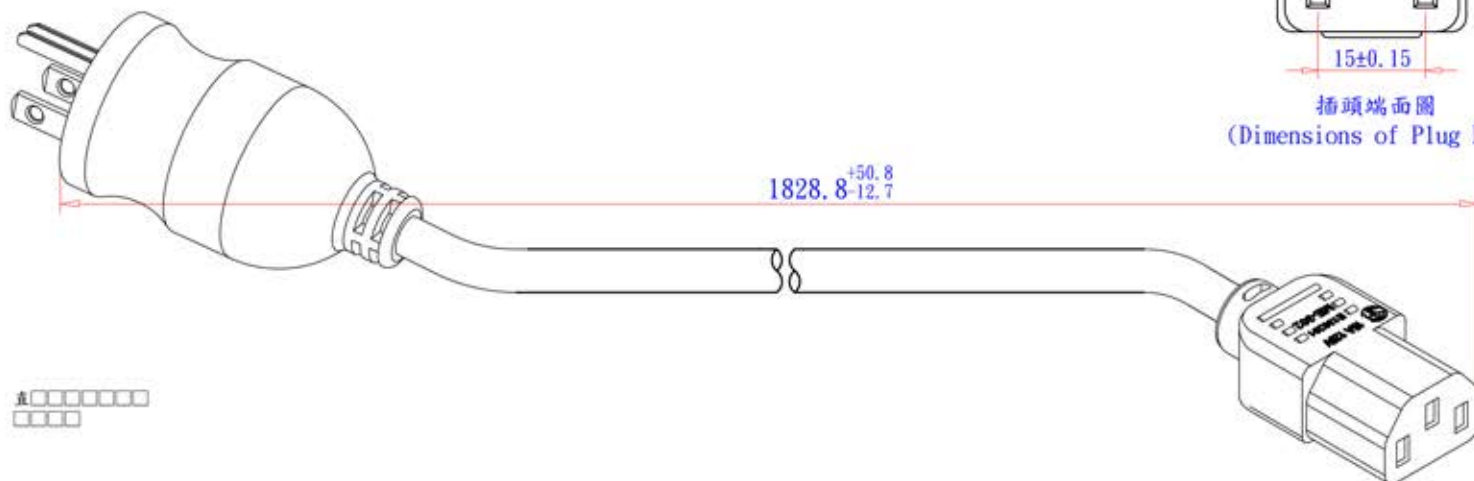


插頭端面圖
(Dimensions of Plug Face)

Insulation Thickness 0.76 mm
Overall Diameter 3.45±0.10 mm

Copper Conductor
41/0.254±0.004 mm
Resistance 8.88
(20°C Max). ohms/km)

Jacket Thickness 0.76mm
Overall Diameter 9.3±0.15mm



線材截面圖
(Wire Cross-Section)

包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	UL Detachable Label

正例事項 (Carton Print)	依客户要求印刷 (See Purchase Order)	I. 高壓測試:1500V/1Sec <1mA (Hi-Pot Test:1500v/1Sec <1mA)
------------------------	---------------------------------	--

電線印字內容 Wire Printed	使用克實 線材 凹印字 (Un-Filler, Gravure)	紙箱等頭標碼 Shipping Mark
V E322763 (UL) SJT 14AWG(2.08mm ²)x3C VW-1 105°C 300V /FT c(UL) SJT 14AWG(2.08mm ²)x3C FT2 105°C 300V -LF- (UL) SJT 14AWG(2.08mm ²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 14AWG(2.08mm ²)x3C FT2 105°C 300V LL43774 -F- -LF-	◊CnC◊	

SIGNATURE	NAME	DATE			
APPROVED					
M.F.G. CHECKED			2011 1128	新版發行	楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION	SYMBOL
DRAWN	楊承正	2011/11/28	PART No.	800-14-00D-GR-0006F	
CUSTOMER			DWG No.		
CnC Tech, LLC Industrial Cable and Connector Technology					

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	