

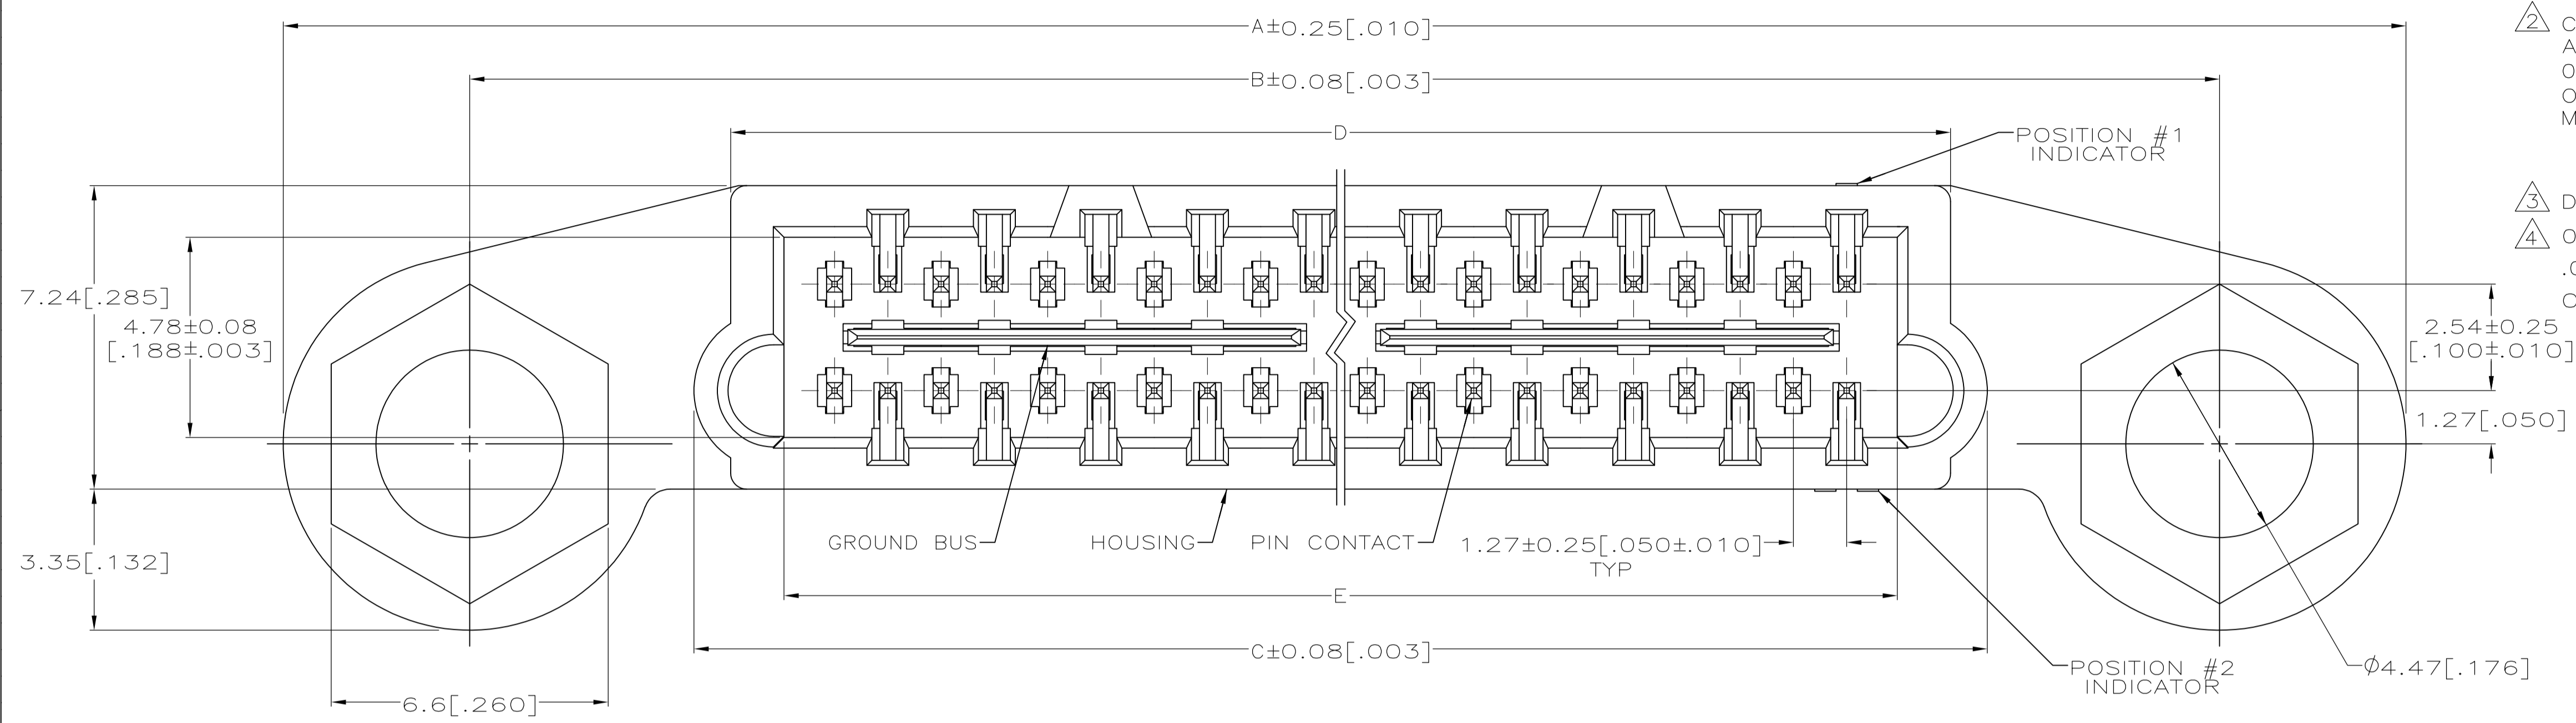
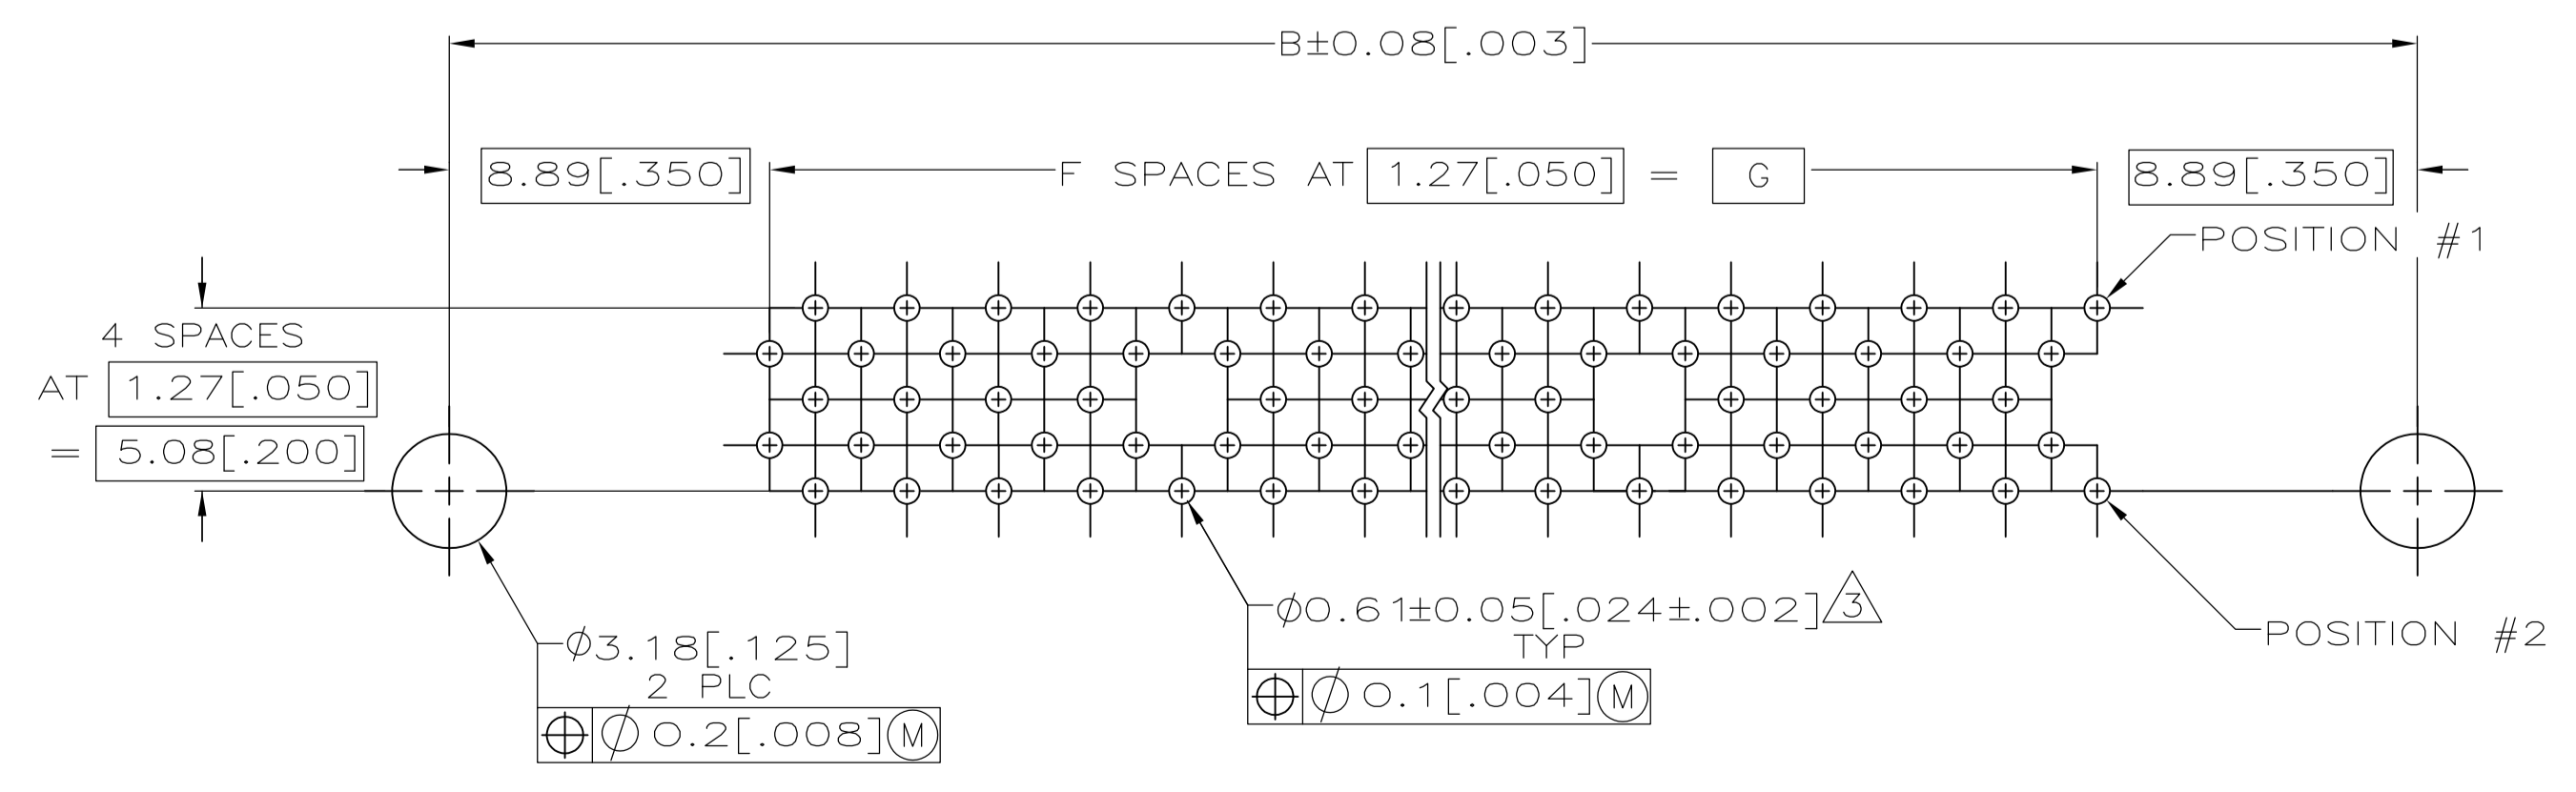


LOC		DIST		REVISIONS				
F	LTR	DESCRIPTION	DATE	DN	APVD			
A		REVISED PER ECO-07-024655	10APR08	DH	DD			

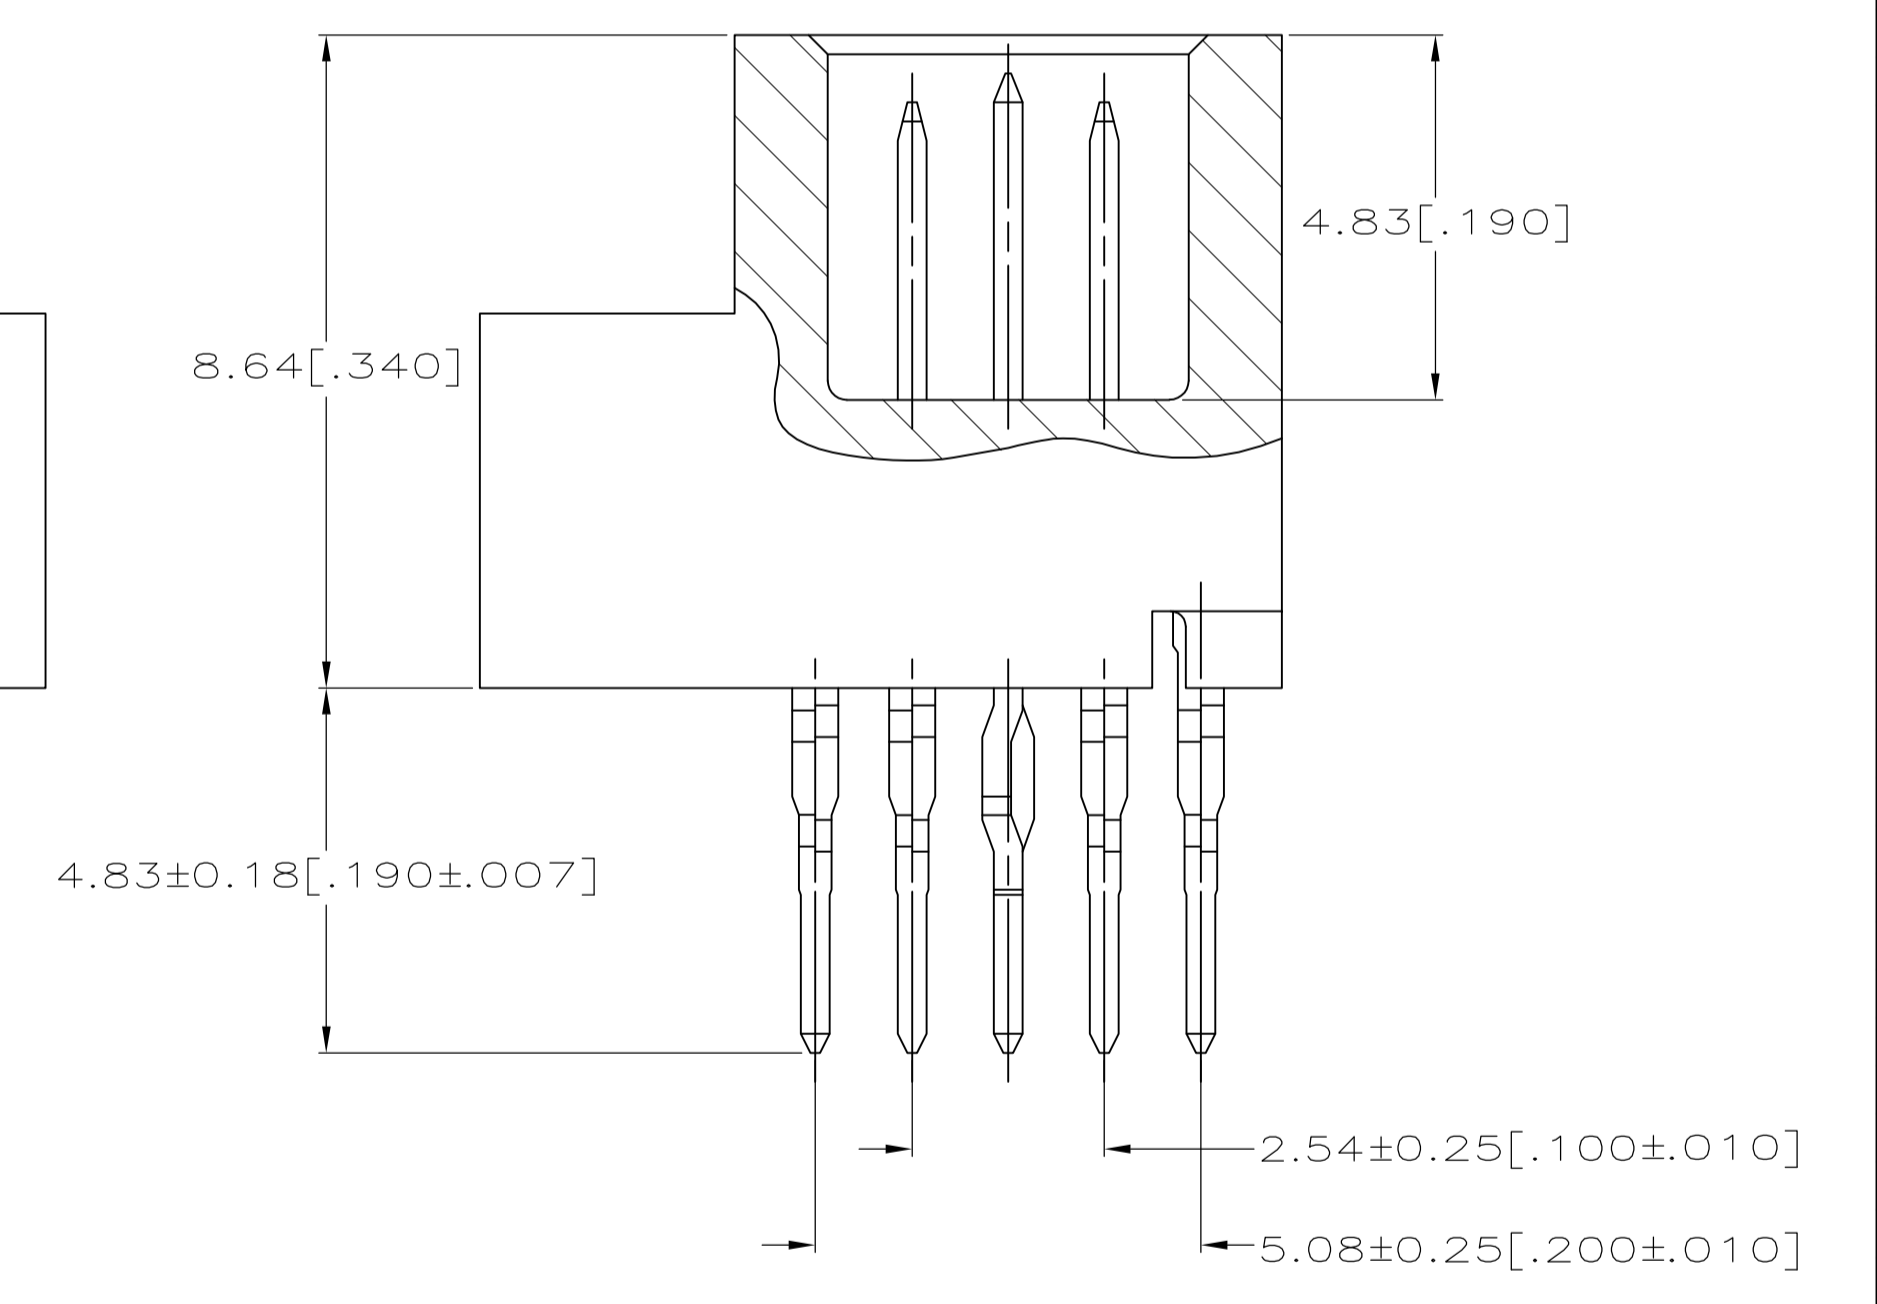

- ① HOUSING: HIGH TEMPERATURE THERMOPLASTIC, COLOR NATURAL.  
 PIN CONTACTS: PHOSPHOR BRONZE.  
 GROUND BUSES: PHOSPHOR BRONZE.
- ② CONTACTS & GROUND BUSES: 0.00076(.000030) MIN. GOLD PER ASTM B 488 ON CONTACT AREA, 0.00254-0.00762(.000100-.000300) MATTE TIN PER ASTM B 545 ON SOLDER TAIL, ALL OVER 0.00127-0.00254(.000050-.000100) MATTE NICKEL PER SAE AMS-QQ-N-290 ON ENTIRE CONTACT.
- ③ DATE CODE MARKED IN AREA INDICATED.
- ④ 0.701[.0276] DIA HOLE, PLATE WITH 0.0076-0.0254[.00030-.00100] TIN-LEAD OVER 0.025-0.038[.0010-.0015] COPPER, 0.61±0.05[.024±.002] DIA HOLE AFTER PLATING.

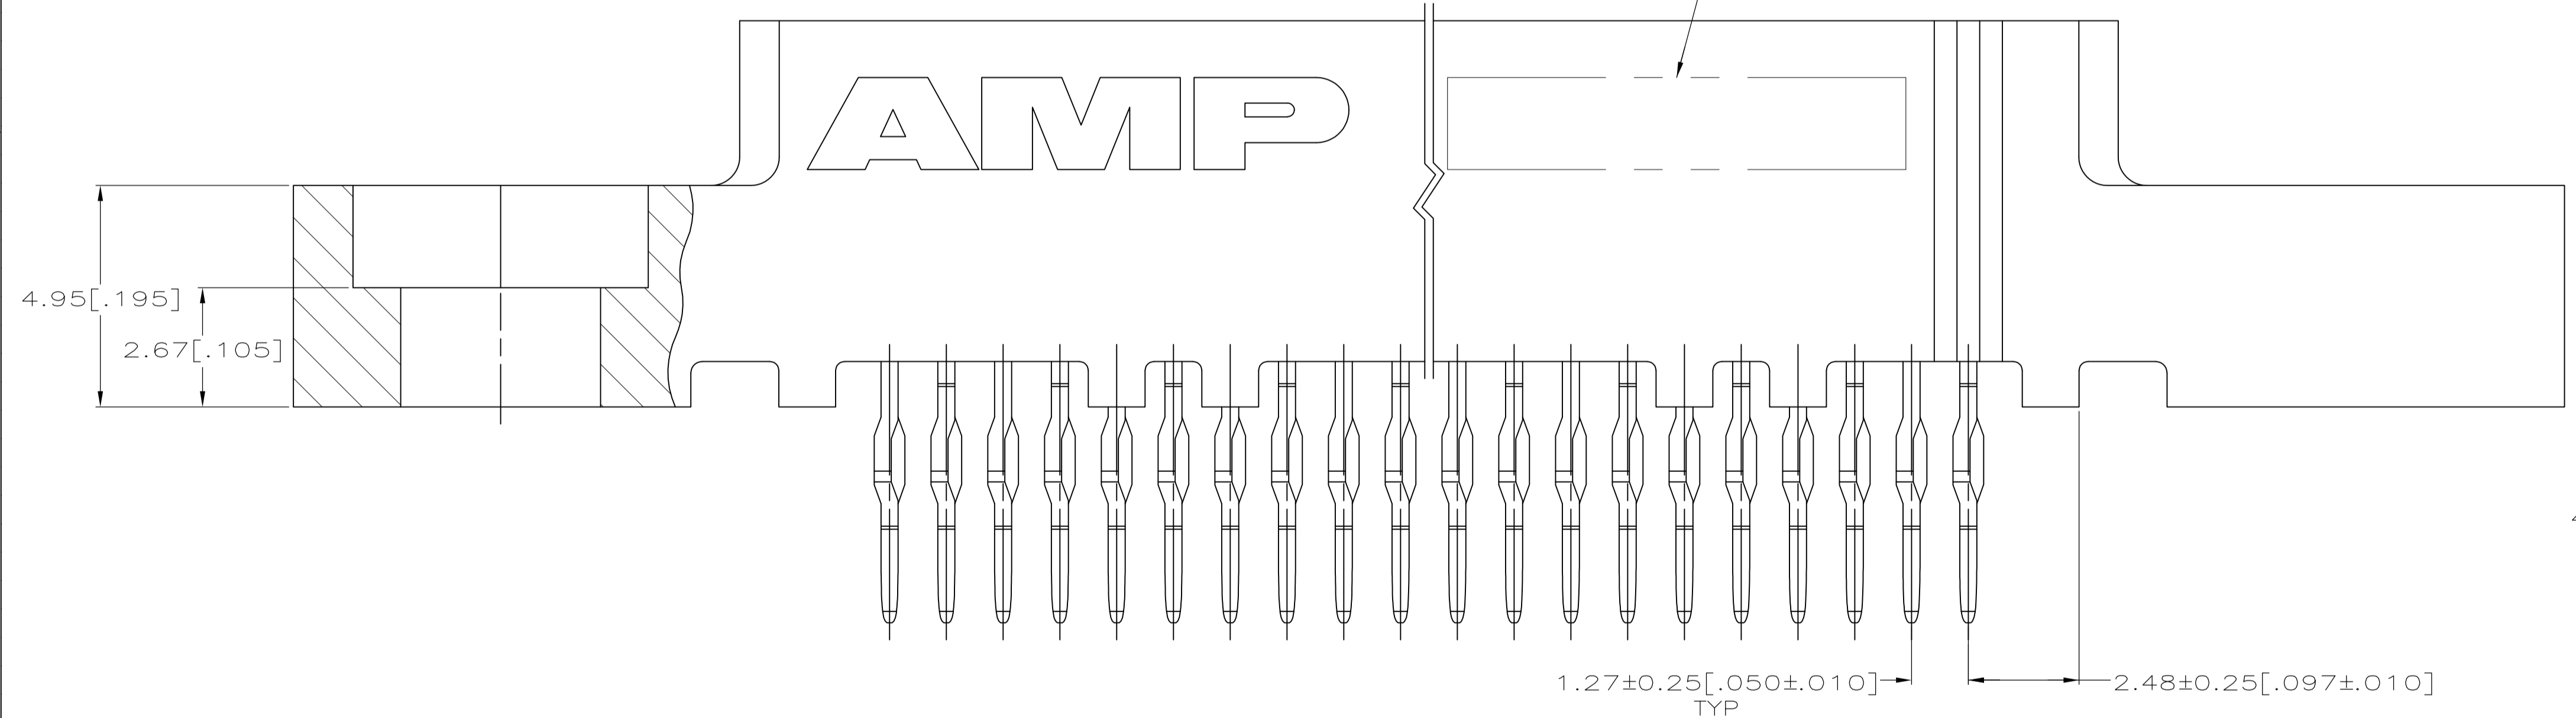

RECOMMENDED PC BOARD HOLE LAYOUT  
 (VIEWED FROM CONNECTOR SIDE)  
 SCALE 5:1

125.73[4.950]	99	128.22[5.048]	130.68[5.145]	132.44[5.214]	143.51[5.650]	152.4[6.000]	200	5536276-3
G	F	E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN A FERNANDEZ 01-20-05		Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK D DIXON 01-20-05		Tyco Electronics Corporation	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D DIXON 01-20-05		Harrisburg, Pa 17105-3608	
0 PLC ± -	1 PLC ± -	NAME		PLUG ASSEMBLY WITH GUIDES, 10.92 [4.30] STACK, 4.83[.190] ACTION PIN	
2 PLC ± -	3 PLC ± 0.13 [0.005]	PRODUCT SPEC		108-1272	
4 PLC ± -	ANGLES ± -	APPLICATION SPEC		114-11005	
MATERIAL		WEIGHT		RESTRICTED TO	
FINISH		SCALE 1:1		SHEET 1 OF 1	
CUSTOMER DRAWING		A1 00779		C=5536276	