

SUMMARY

Wires

Low	2
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series

Termination type	Female solder
IP rating	68
Cable Ø	2.60 - 3.00 mm
Matching parts	FFA.1E.302.CLAC30Z
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PCA*: Free receptacle, cable collet and nut for fitting a bend relief
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 2.6 - 3 mm
Variant	Z : Nut for fitting a bend relief

Performance

Configuration	1E.302 : 2 Low Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	15 Amps

Specifications

Contact Type:	Solder
Max. Matings:	5000
Contact Dia.:	1.3 mm (0.051in)
Bucket Dia.:	1 mm (0.039in)
Max. Solid Conductor:	0.5 mm ² (AWG 20)
Max. Stranded Conductor:	0.5 mm ² (AWG 20)


R (max): 3.6 mOhm
Vtest: 1200 V (AC), 1700 V (DC)

Others

Humidity (max): <=95% [at 60 deg C /140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >1000 hr
Climatical Category: 50/175/21
Shielding (min): 95 dB (10 MHz)
Shielding (min): 80 dB (1 GHz)
IP Rating: 68

DRAWINGS

Draws

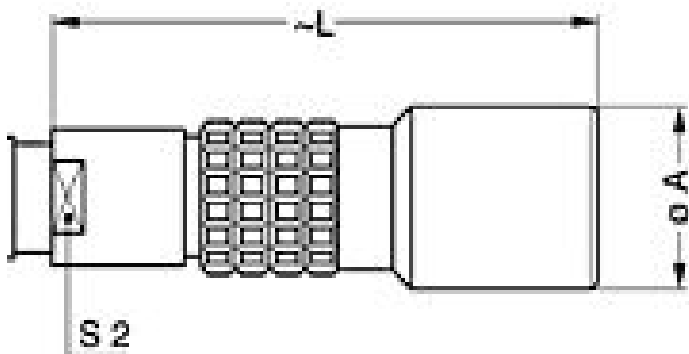

Dimensions

	A	L	S2
mm.	15	45	9
in.	0,59	1,77	0,35

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1E.008.PA090

Cables



Property of LEMO SA. All rights reserved
This document is not contractual

CMN.02.T28.030PGCE CMN.02.T28.030PGZE	PVC	GREY Grey	
CMN.02.T28.030PNCE	PVC	Black	
CMN.02.T28.030PNZE			
002 050	PVC	Black	
002 260	PTFE	White	