

CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF COOPER INDUSTRIES, INC. IT IS NOT FOR PUBLIC DISCLOSURE. POSSESSION OF THE INFORMATION DOES NOT CONVEY ANY RIGHT TO LOAN, SELL OR DISCLOSE THE INFORMATION. UNAUTHORIZED REPRODUCTION OR USE OF THE INFORMATION IS PROHIBITED. THIS DOCUMENT IS TO BE RETURNED TO COOPER INDUSTRIES, INC. UPON COMPLETION OF THE PURPOSE FOR WHICH IT IS LOANED OR UPON REQUEST.

COPYRIGHT Cooper Industries, Inc.  
This is an unpublished work. The disclosure of this work is limited to select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.

SCALE  
**2X**

UNLESS OTHERWISE SPECIFIED TOLERANCES TO BE:  
METRIC ± .13mm  
INCHES ± .005"  
ANGULAR ± 2°



▲ (O) INDICATES CRITICAL DIMENSION OR FEATURE

PAGE 1

DATE	3-8-02	NO.	KTK 35-50
TITLE	LIMITER		
SUP. NO.	KTK 35-50	C	DATED
DWG	BAM	CK	CHANGE
ENC			E
			SB02087
<b>COOPER Bussmann</b> St. Louis, MO 63178			
DISTRIBUTION	46636	56	J

Ⓧ METRIC (mm)  
INCHES

Ⓧ REVISED &  
REDRAWN

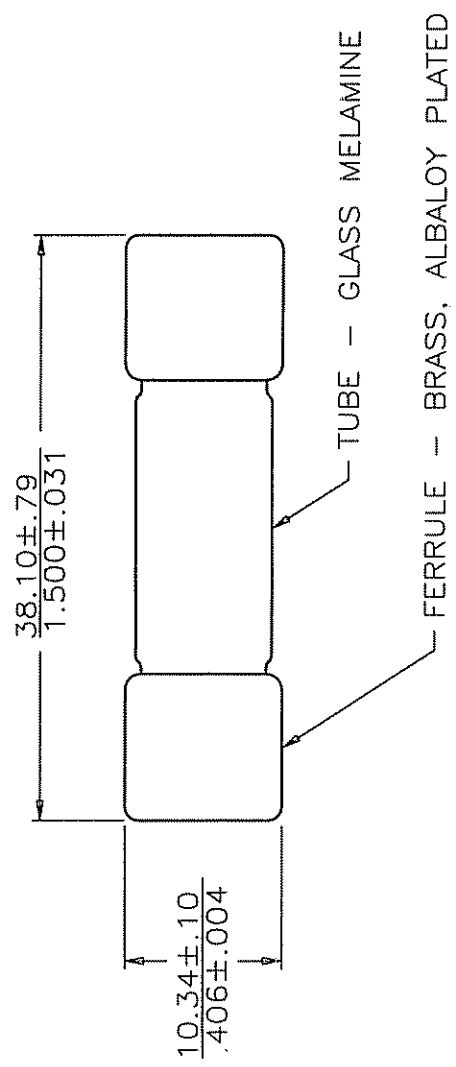

AMP RATING	PART NO.
35	KTK-35
40	KTK-40
45	KTK-45
50	KTK-50

DESIGNED TO:  
OPEN IN 2-4 SECONDS AT 500% RATING WHEN  
TESTED IN A STANDARD 30 AMPERE CIRCUIT

CUSTOMER PRINT