


適合ターミナル
ACCEPT TERMINAL
5194*,5225*

注記
NOTES

1. 各部の反りは0.5最大。
WARPING : 0.5 MAX.
2. サークットNO.はNO."1"のみ表示。
CIRCUIT NO.: 1 ONLY.
3. ELV及びRoHS適合品。
ELV AND RoHS COMPLIANT.

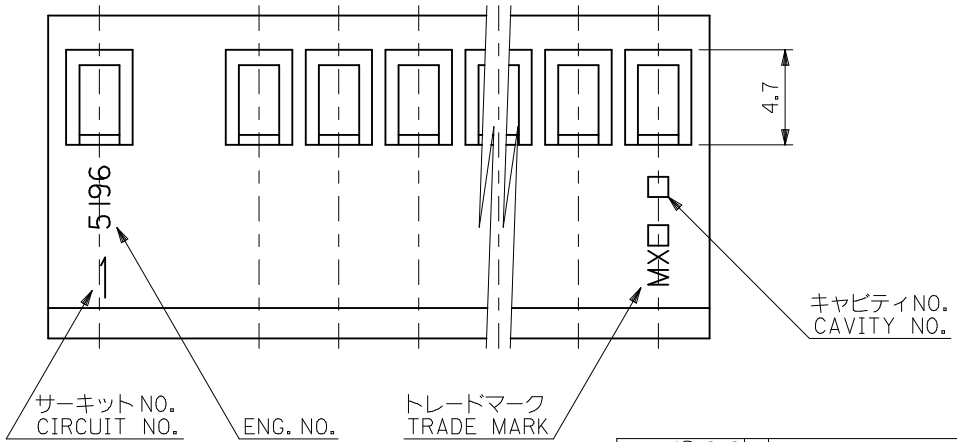

| | | | | |
|-------|-------|------------|----------|----------|
| 52.62 | 47.52 | 09-50-1123 | 5196-12 | 12 |
| 48.66 | 43.56 | ↑ -1113 | ↑ -11 | 11 |
| 44.7 | 39.6 | -1103 | -10 | 10 |
| 40.74 | 35.64 | -1093 | -09 | 9 |
| 36.78 | 31.68 | -1083 | -08 | 8 |
| 32.82 | 27.72 | -1073 | -07 | 7 |
| 28.86 | 23.76 | -1063 | -06 | 6 |
| 24.9 | 19.8 | -1053 | -05 | 5 |
| 20.94 | 15.84 | -1043 | -04 | 4 |
| 16.98 | 11.88 | ↓ -1033 | ↓ -03 | 3 |
| 13.02 | 7.92 | 09-50-1023 | 5196-02 | 2 |
| B | | A | EDP. NO. | ENG. NO. |

| | | | | | | | | | | | |
|--|--|--|----------------------------|-----------|-----------------|--|------------------------------|--|---------------------------|--|--|
| REVISED EC NO: J2009-2074 DRWN: CARIZONO 2009/04/15 CHKD: T. HIRUYAMA 2009/04/16 APPR: NUKITA 2009/04/16 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE 4:1 | | DESIGN UNITS METRIC | | THIRD ANGLE PROJECTION | | |
| | 10 UNDER | ±0.2 | DRAWN BY M. FUJIKURA | | DATE 1992/09/07 | | TITLE SPOX 7.92/3.96 REC HSG | | | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY H. HIRAMOTO | | DATE 1992/09/08 | | MOLEX MOLEX INCORPORATED | | | | |
| | 30 OVER | ±0.3 | APPROVED BY M. FUKUSHIMA | | DATE 1992/09/08 | | DOCUMENT NO. SD-5196-001 | | SHEET NO. 1 OF 1 | | |
| 材料 MATERIAL ナイロン66, UL94V-2 色: オフホワイト NYLON66, UL94V-2 COLOR: OFFWHITE | | ANGULAR ±3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SEE TABLE | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | |