
т	۵	п	m	0





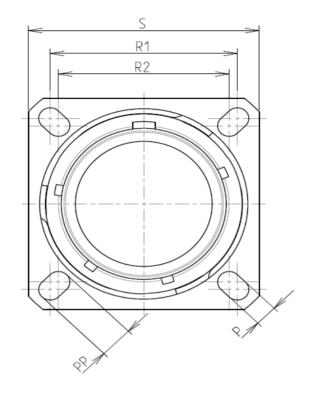

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 11.73 g ± 10%

8D 0

G

11

F

98

А

F

А

Connector dimension Dim Nominal		
P	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	


**ORIENTATION : A** 

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-98

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

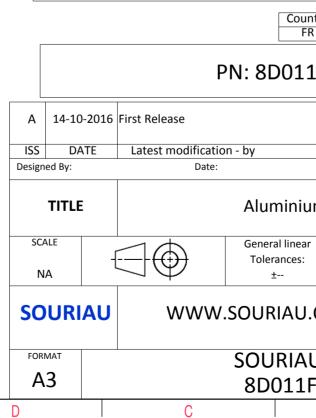

σ		Þ			
				4	
AS EXAMPLE				3	
any non-conforming which does not co er of the Parties or I adation, technical n untry Jurisc FR 1F98AA	mply with by a third part			2	
I.COM	DRG N° SHEET				
F98AA-C B		A	1/2	J	

	<u> </u>	۵	וד	m		0
		Contact Layout				Panel Cutou
4	-×(	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & $			T	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont positi ID A B C C D E E F Shell Arrangement Numb	Jon (mm)         X-axis (mm)         Y-axis (mm)           +.000 (0.00)         +.130 (3.30)           +.130 (3.30)         +.000 (0.00)           +.065 (1.65)        113 (2.87)          065 (1.65)        113 (2.87)          063 (3.30)         +.000 (0.00)           +.000 (0.00)         +.000 (0.00)	1		1 1 1 2	
	Shell     Arrangement     Numbridge       size     no.     conta       11     -98     6	acts contacts rating location				Dim
ယ						ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D011F
	-				A 14-10-2 ISS DAT Designed By:	2016 First Release E Latest modification - by Date:
					TITLE	Aluminium
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011F9
	Н	G	F	E	D	C

