


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
DF	50				H	REDRAWN ON CAD DF-5533 PY	11-91	DE
					J	ADD -4,0600-2051-94 CT	5-94	DE

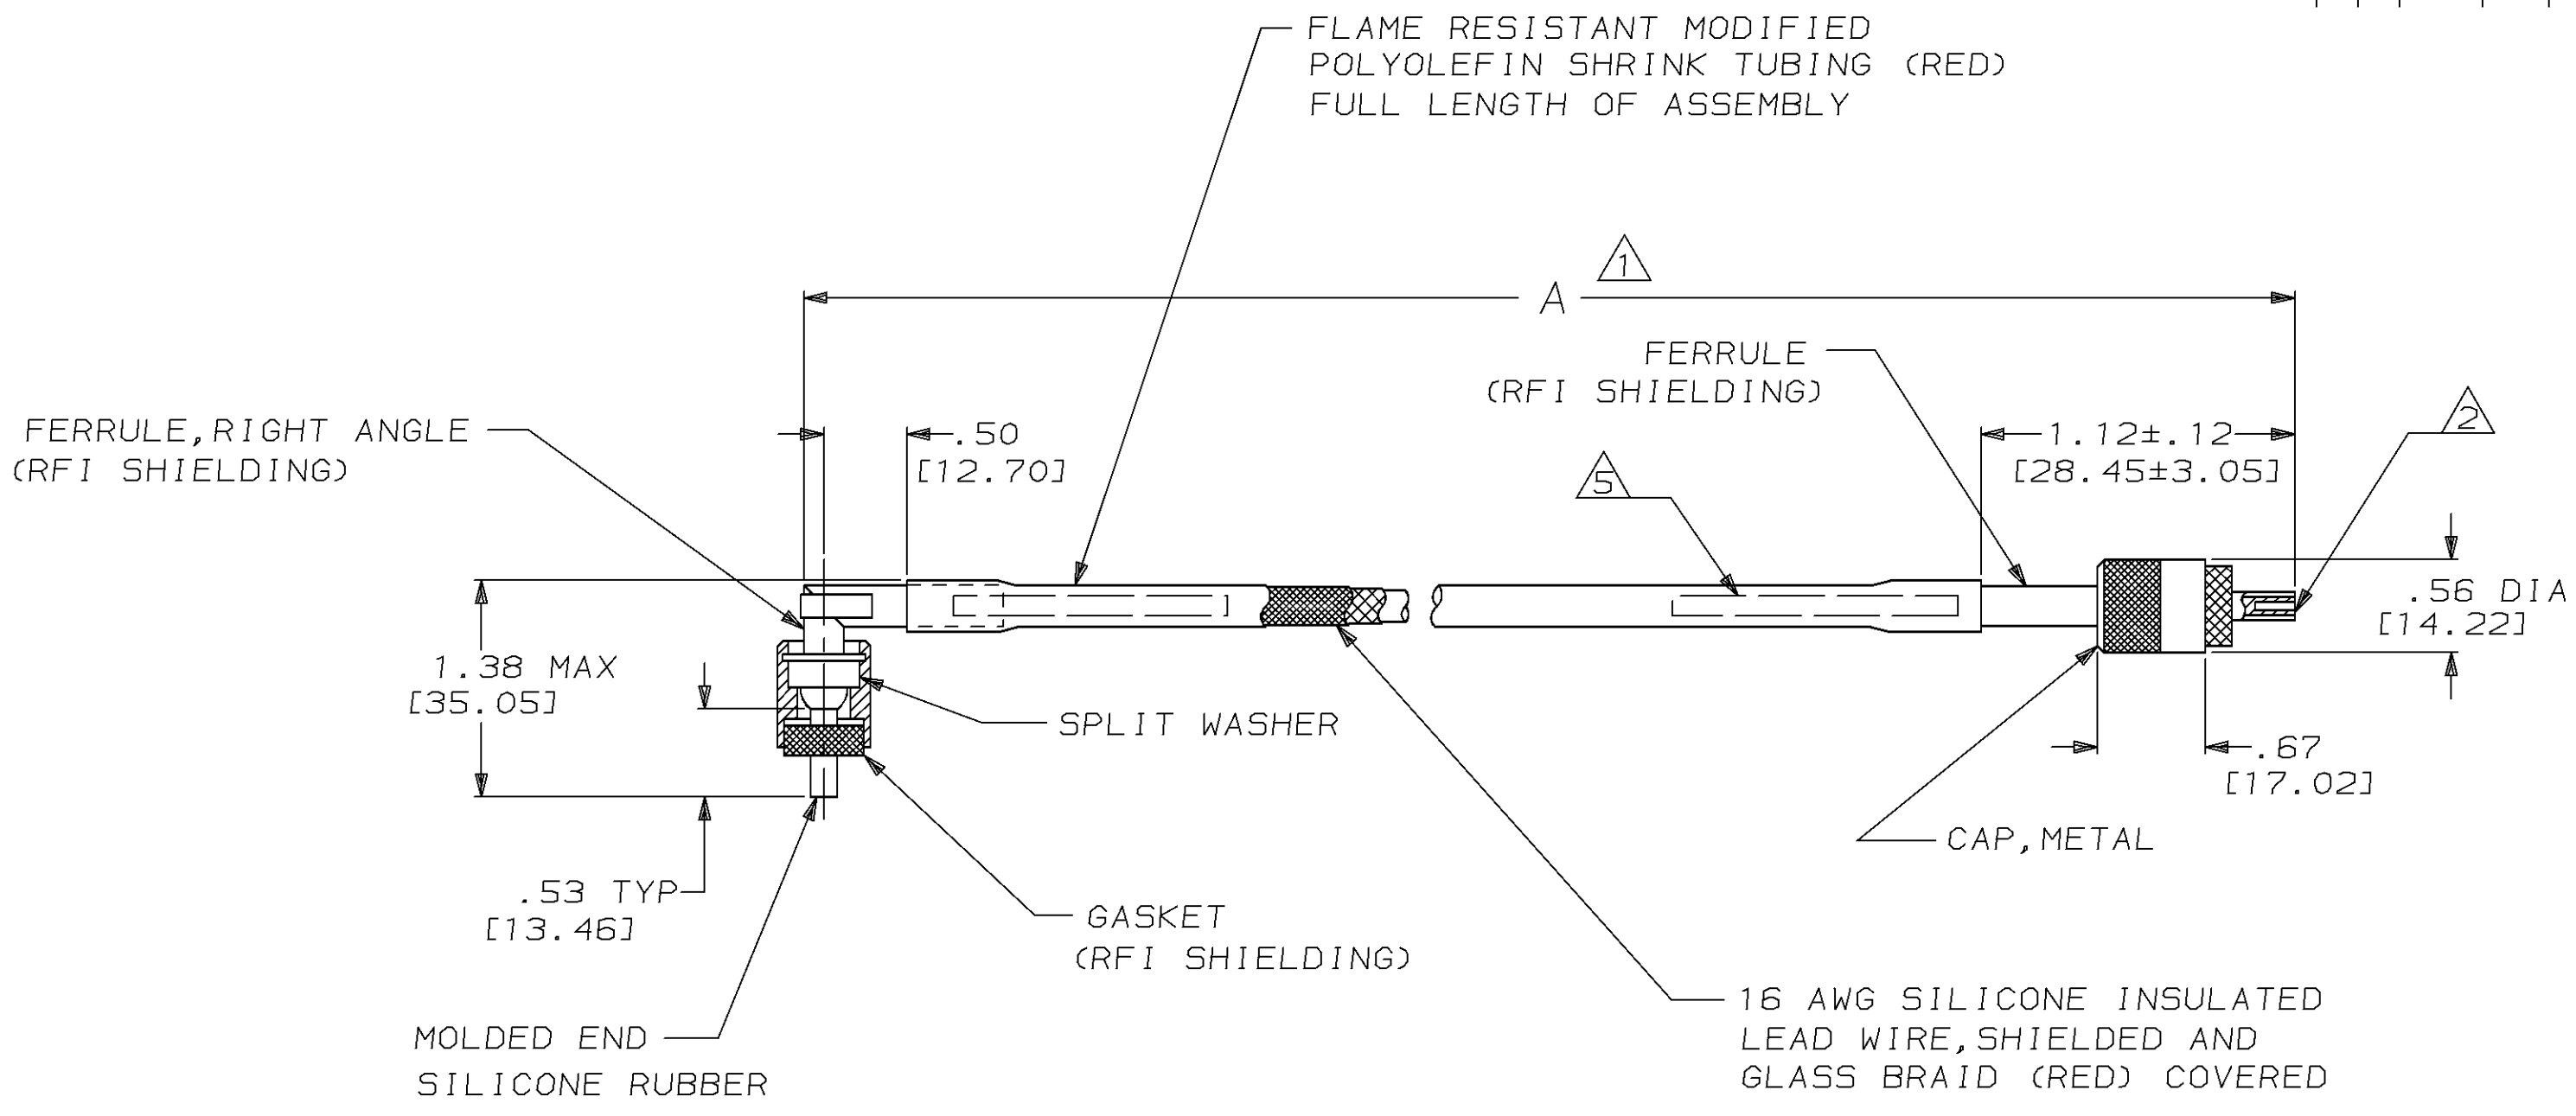

- ① TOLERANCE: UP TO 24.00 = ±.12 AND 24.00 AND UP =±1%
- ② TO MATE WITH AMP LGH-1/2 RECEPTACLE WITH .53 BARREL DEPTH
- 3. MARK PER AMP SPEC 830842, PURPLE INK
- 4. AMP PART NO AND DATE CODE SHALL BE MARKED SHRINK TUBING (RED) LOCATED APPROX ON CENTER OF LEAD ASSY
- ⑤ MARK "SWITCH OFF BEFORE DISCONNECT" 2 PLACES ON EACH END, 4 PLACES TOTAL

	71.12 [1806.4]	859097-4
	96.00 [2438.4]	859097-3
OBSOLETE	80.00 [2032.0]	859097-2
	69.12 [1755.6]	859097-1
A		PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .02 3 PLC DEC ± - ANGLES ± -		DR 11-7-91 P.YEAGER		AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL SEE CALLOUTS		CHK 11-8-91 D.EABY			
FINISH -		APPD 11-8-91 D.EABY		NAME LGH-1/2 RIGHT ANGLE RFI SHIELDED LEAD ASSEMBLY	
		RLSE 11-8-91 P.YEAGER		SIZE C 00779	
		PRODUCT SPEC -		DRAWING NO 859097	
		APPLICATION SPEC -		SCALE NONE	
		WEIGHT -		SHEET 1 OF 1	