


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

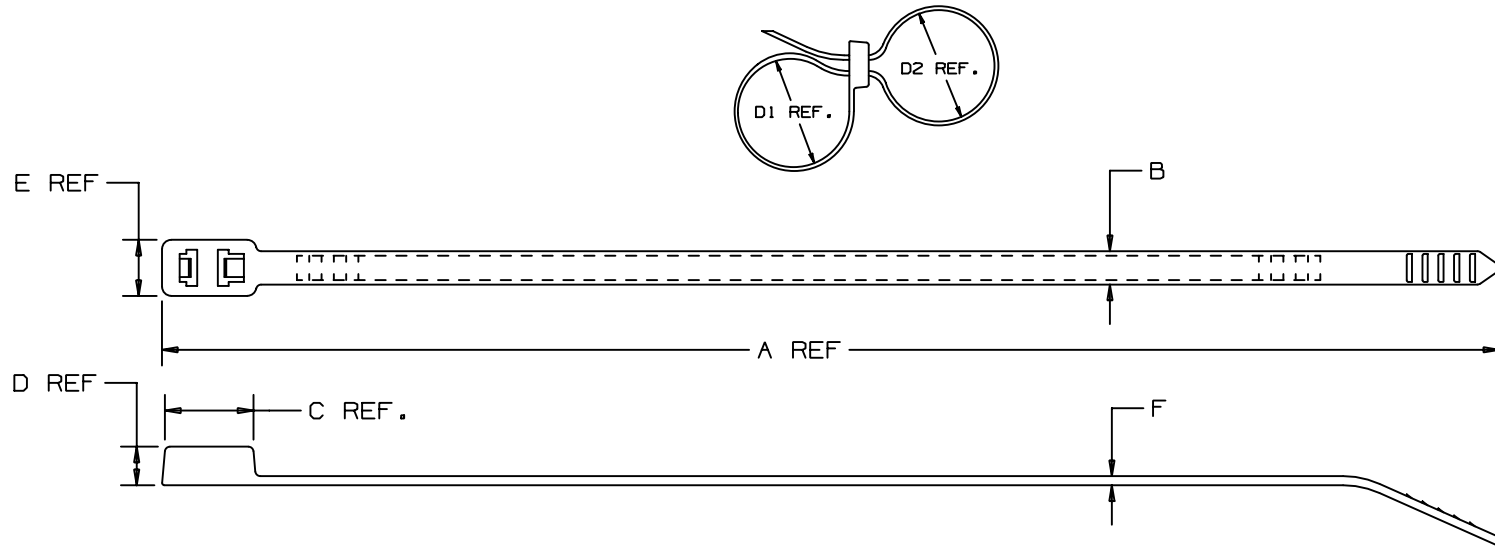

| PANDUIT PART NO. * | MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm) | A in (mm) | B ±.01in (±.25mm) | C in (mm) | D in (mm) | E in (mm) | F ±.01in (±.25mm) | MIN. LOOP TENSILE lbs (N) | CROSS SECTION | WEIGHT lbs/100 pcs. (g) |
|--------------------|---|------------|-------------------|-------------|------------|------------|-------------------|---------------------------|---------------|-------------------------|
| PLB3S-M30 | 3.0 (76.2) | 11.8 (300) | .190 (4.8) | .465 (11.8) | .220 (5.6) | .337 (8.6) | .052 (1.3) | 50 (222) | STANDARD | .47 (214) |

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PLB3S-M30 BOW-TY CABLE TIE
PLB SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
KET

MAT'L:

SCALE NONE

DATE
6/4/96

HEAT STABILIZED
BLACK NYLON 6/6

DRAWING NO. SS-27026
DWG SIZE A

CHK'D
HVP

| REV | DATE | BY | CHK | DESCRIPTION | ECN - R | CUST | SUP |
|-----|---------|----|-----|----------------------------|---------|------|-----|
| 2 | 4/29/02 | TJ | | CHANGED FORMAT FOR CLARITY | 27026 | 2 | |