


HV RAD-LDD Indust X7R HV, Ceramic, 4700 pF, 10%, 2000 VDC, X7R, Commercial, High Voltage, Lead Spacing = 5.59mm

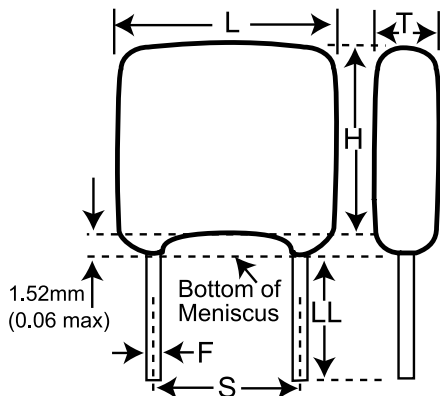

Dimensions

L	8.13mm MAX
H	7.11mm MAX
T	6.35mm MAX
S	5.59mm +/-0.76mm
LL	31.75mm MIN
F	0.635mm +0.102/-0.051mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	1

General Information

Supplier:	KEMET
Series:	HV RAD-LDD Indust X7R HV
Style:	Radial
Description:	Commercial, High Voltage
Features:	Commercial
RoHS:	No
Termination:	Lead (SnPb)
Failure Rate:	N/A

Specifications

Capacitance:	4700 pF
Capacitance Tolerance:	10%
Voltage DC:	2000 VDC
Dielectric Withstanding Voltage:	3,000 V
Temperature Range:	-55/+125C
Temperature Coefficient:	X7R
Dissipation Factor:	2.5%
Insulation Resistance:	100 GOhms