

Printed-circuit board connector - MCDN 1,5/20-G1-3,5 CPRN26THRAU - 1795080

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 8 A, Number of positions: 20, Pitch: 3.5 mm, Color: black, Contact surface: Gold



Key commercial data

Packing unit	1 pc
Custom tariff number	85366990
Country of origin	Bulgaria

Technical data

Dimensions

Pitch	3.5 mm
Dimension a	66.5 mm

General

Range of articles	MCDN 1,5/...G1-RN-THR
Rated voltage (III/3)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Color	black
Number of positions	20

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701

Printed-circuit board connector - MCDN 1,5/20-G1-3,5 CPRN26THRAU - 1795080

Classifications

eCl@ss

eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized		
	B	D
Nominal current I _N	8 A	8 A

Printed-circuit board connector - MCDN 1,5/20-G1-3,5 CPRN26THRAU - 1795080

Approvals

	B	D
Nominal voltage UN	150 V	150 V

cUL Recognized

	B	D
Nominal current IN	8 A	8 A
Nominal voltage UN	150 V	150 V


GOST

GOST

cULus Recognized

Drawings

Diagram

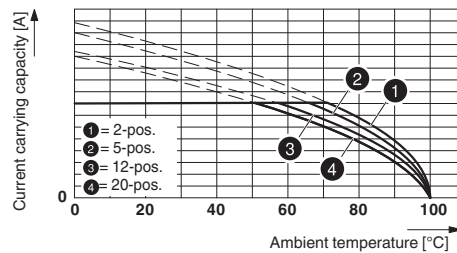

Type: FMC 1,5/...-ST-3,5-RF AU with MCDN 1,5/...-G1-3,5 RNP26THR AU