
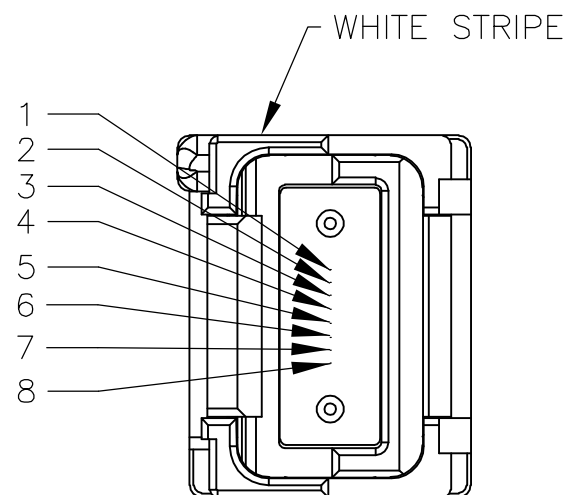


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	A	RELEASED PER NPR 06-0823	24AUG06	JWD JB

1. MAXIMUM INSERTION LOSS: 0.5 dB MPX  
0.5 dB LC
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

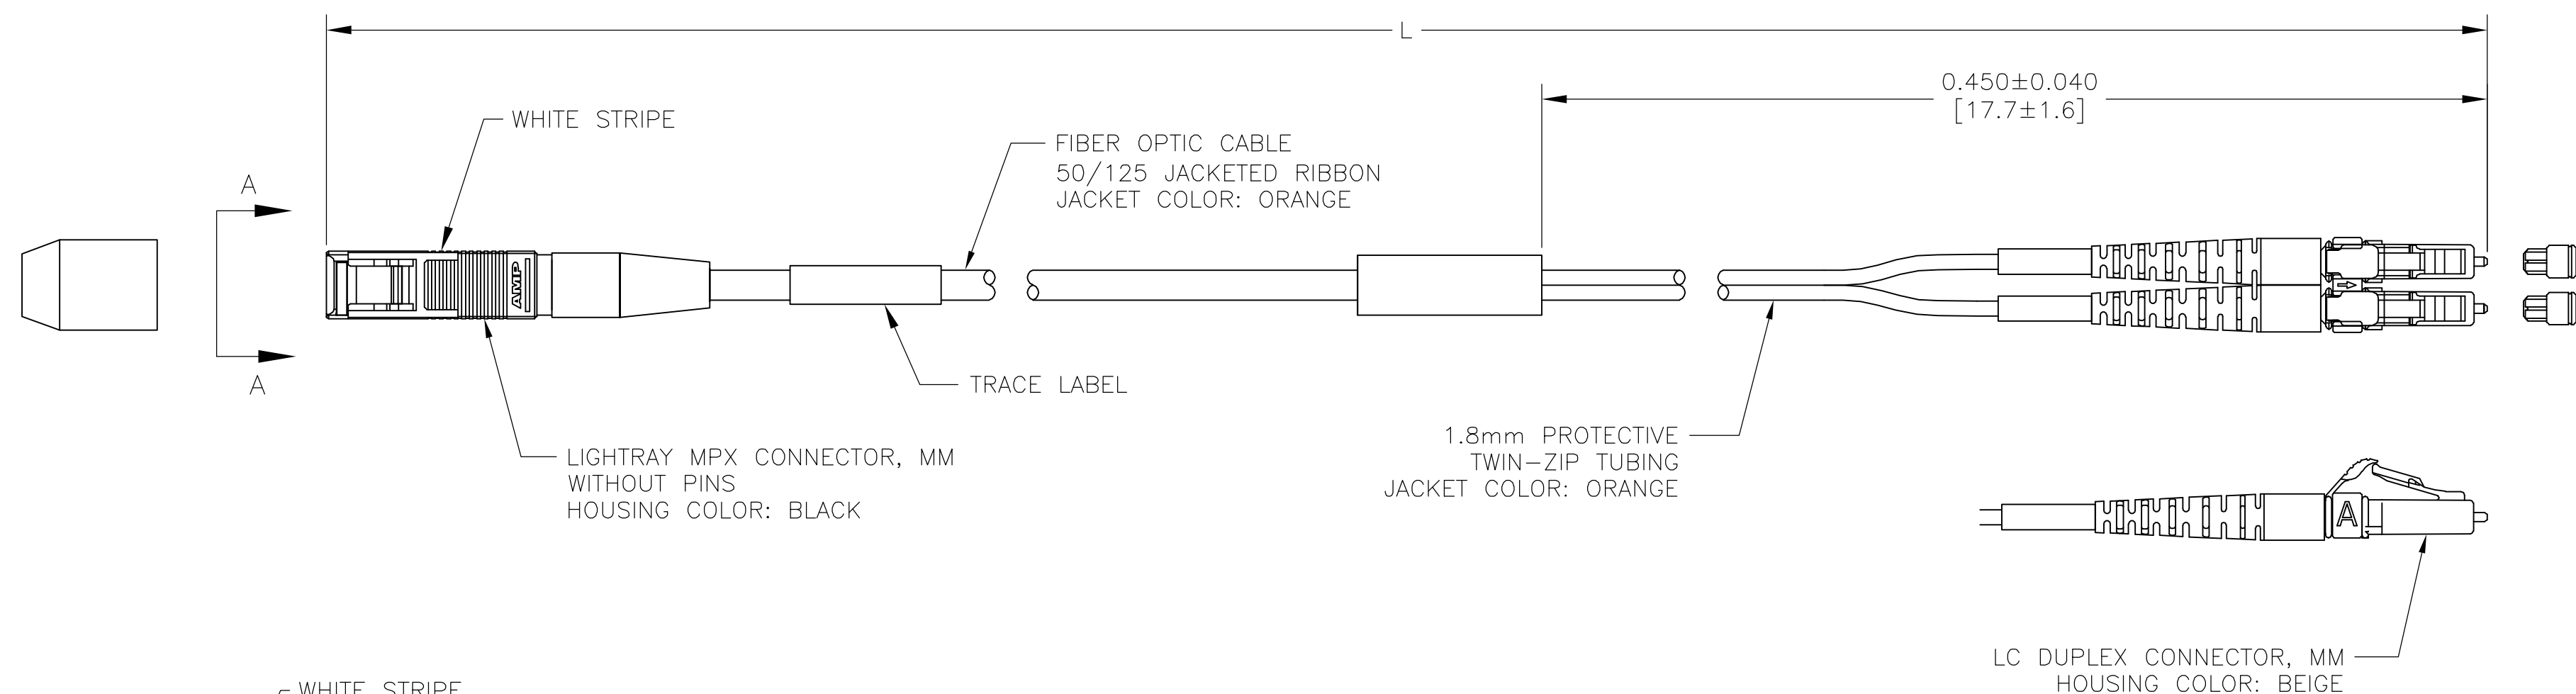

FIBER #/ COLOR	LC CONNECTOR	STATUS <sup>4</sup>
1 BLUE	-	NOT USED
2 ORANGE	-	NOT USED
3 GREEN	-	NOT USED
4 BROWN	A	ACTIVE
5 SLATE	B	ACTIVE
6 WHITE	-	NOT USED
7 RED	-	NOT USED
8 BLACK	-	NOT USED

VIEW A-A  
NOT TO SCALE

LIGHTRAY MPX CONNECTOR FIBER PATH

2.388+0.101/-0.0 [94.0+4.0/-0.0]	1918852-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 24AUG06	 Tyco Electronics Corporation Harrisburg, PA 17105-3608																					
DIMENSIONS: METERS [INCHES]		CHK J.BARRY 24AUG06																						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL 24AUG06	NAME CABLE ASSEMBLY, FIBER OPTIC, 2 FIBER, 50/125 JACKETED RIBBON CABLE, LIGHTRAY MPX (NO PINS) TO LC DUPLEX																					
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> <tr><td>FINISH</td><td>-</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	FINISH	-	-	PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	SIZE A2
0 PLC	±	-																						
1 PLC	±	-																						
2 PLC	±	-																						
3 PLC	±	-																						
4 PLC	±	-																						
ANGLES	±	-																						
FINISH	-	-																						
MATERIAL -		CUSTOMER DRAWING	CAGE CODE 00779 DRAWING NO. 1918852 RESTRICTED TO SCALE NTS SHEET 1 OF 1 REV A																					