

Antenna - RAD-ISM- 900-ANT-OMNI-0-N - 5604160

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Omnidirectional antenna, 900 MHz, gain: 2 dBi, polarization: linear, opening angle: h 360°, connection: N (female), incl. mounting bracket for wall mounting

Why buy this product

- For freely mobile applications
- For multipoint or mesh connections

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 288743
GTIN	4046356288743

Technical data

Dimensions

Height	88.9 mm
Diameter	3.175 mm
Fixed cable length	3.00 in.

Ambient conditions

Ambient temperature (operation)	-40 °C ... 75 °C
---------------------------------	------------------

General

Frequency range	900 MHz
	890 MHz ... 960 MHz
Horizontal beamwidth	360 °
Polarization	Linear vertical
Impedance	50 Ω
Gain	2.15 dBi
Connection method	Type N (female)

Antenna - RAD-ISM- 900-ANT-OMNI-0-N - 5604160

Technical data

General


Cable type	RG-58
Fixed cable length	3.00 in.
Material	V2A (Antenna housing)
	V2A (Bracket)
Mounting type	Wall mounting

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Schematic diagram

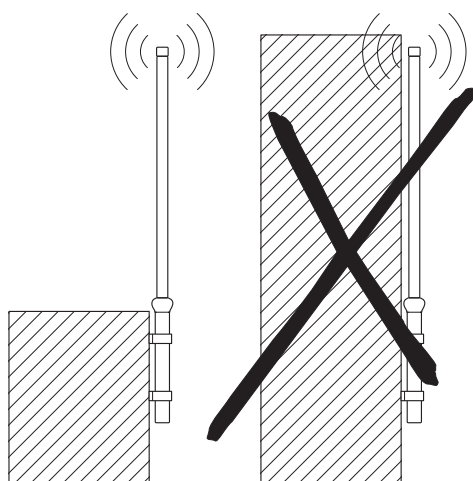

Schematic diagram

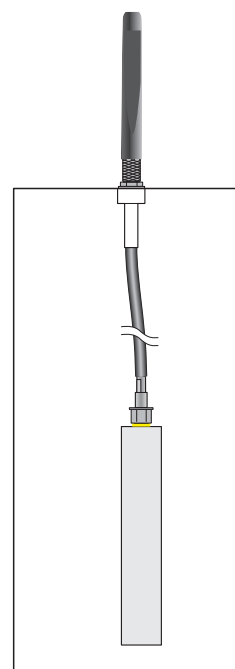

Installation example