


PART NUMBER  
SSB-LX2550GD



REV.  
A

DATE	E.C.N NUMBER AND REVISION COMMENTS	REV.
09.02.16	ECN-Lumex201600059	A

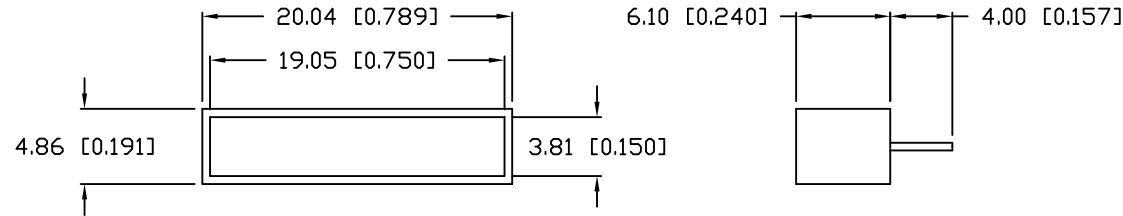

ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^{\circ}\text{C}$


PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.2	2.6	$V_f$	
REVERSE VOLTAGE			5.0	$V_r$	$I_f=100\mu\text{A}$
LUMINOUS INTENSITY		50		mcd	$I_f=20\text{MA}$
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN DIFFUSED				

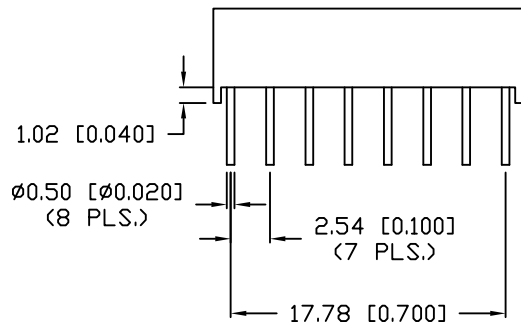

LIMITS OF SAFE OPERATION AT  $25^{\circ}\text{C}$

PARAMETER	MAX	UNITS
FORWARD CURRENT	20	mA
OPERATING, STORAGE TEMP.	- 40 TO + 85	$^{\circ}\text{C}$
SOLDERING TEMP.*	MAX. 3SEC.@260	$^{\circ}\text{C}$

\* 2mm BELOW PACKAGE BASE



\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00, MAX.= +0.00 -DECIMAL PRECISION

REV. A	PART NUMBER SSB-LX2550GD
-----------	-----------------------------

5mm x 20mm 4 CHIP LIGHT BAR,  
565nm GREEN CHIPS, GREEN DIFFUSED.

**CONFIDENTIAL INFORMATION**  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

**RELIABILITY NOTE**  
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

**LUMEX** 425 N. GARY AVE.  
CAROL STREAM, IL 60188  
PHONE: 800-278-5666  
FAX: 630-315-2152  
WEB: WWW.LUMEX.COM  
*Creating LED and LCD Solutions Together™*

DRAWN BY: K.Y.	CHECKED BY: G.Y.	APPROVED BY: R.C.	DATE: 09.02.16 PAGE: 1 OF 1 SCALE: N/A
-------------------	---------------------	----------------------	--