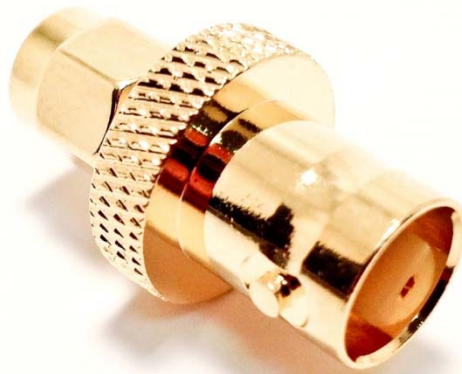


BU-P4290**(Adapter: Female BNC to Male SMA)**

- Material: Body: Gold plated brass
Contacts: Gold plated beryllium copper
Insulator: PTFE
- Length: 1.02" (26 mm), OD: .59" (15mm)
- Impedance: 50Ω
- Frequency: 0 to 12.4 GHz
- Voltage: Shield/Contact: 335 VRMS Max.
Shield/Earth: 30 VAC Max.
- Operating Temperature: -50°C to 170°C
- RoHS Compliant