

# FA28X8R1E154KRU06




## Application

Automotive Grade

## Series

FA28

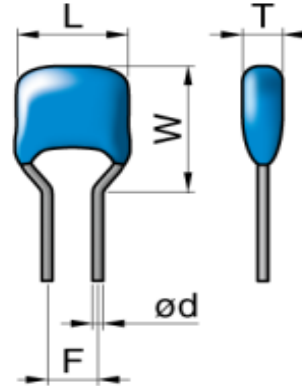

## Dimensions

- L 4mm Max.
- W 5.5mm Max.
- T 2.5mm Max.
- F 5mm +0.8,-0.2mm
- d 0.5mm +0.1,-0.03mm

## Temperature Characteristic

-55 to 150°C +/-15%

## Rated Voltage

25Vdc

## Capacitance

150nF

## Capacitance Tolerance

+/-10%

## Dissipation Factor

3% Max.


## Insulation Resistance

3333Mohm Min.


## AEC-Q200

Yes


### |Z| vs. Freq. Characteristic

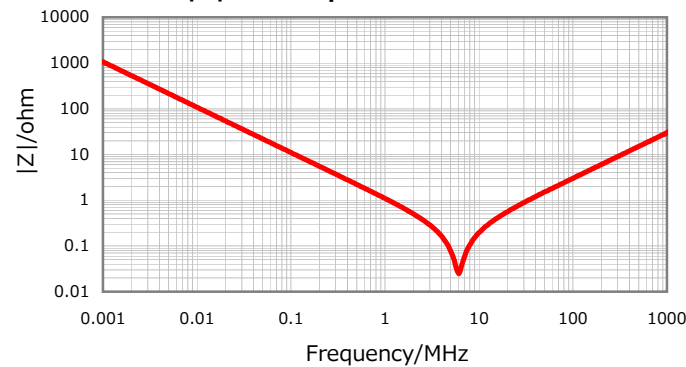

### DC Bias Characteristic

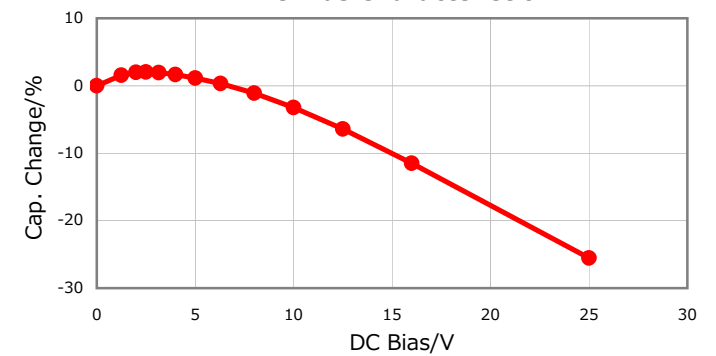

### Cap. vs. Freq. Characteristic

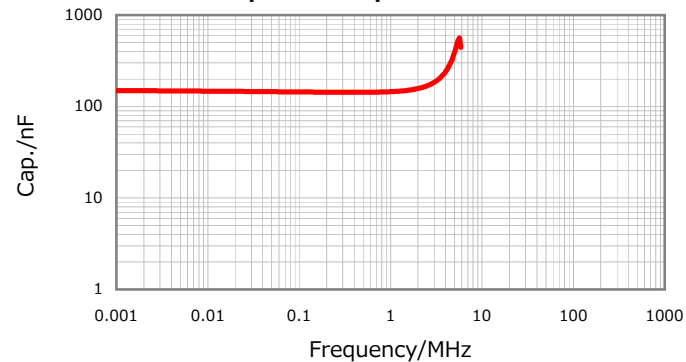

Characterization Sheet (MLCC with Dipped Radial Lead)



All specifications are subject to change without notice.

December 28, 2015