


Specification Sheet

Part Number: 596-00800

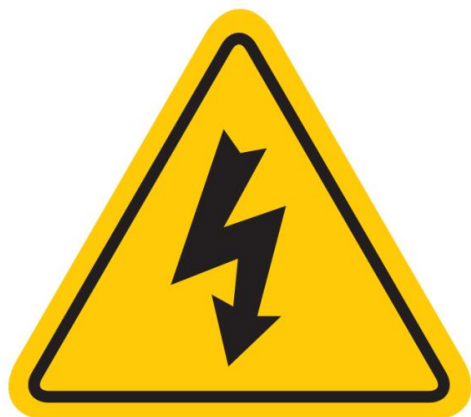

Hazard Label, 2.0" x 2.0", PET, Yellow, 50/roll

Article Number

596-00800

Type

HL2X2YE

Color

Yellow (YE)

Features & Benefits

- Pre-Printed Solar Labels are made with UV-stable inks and materials for durability and weather resistance.
- Polyester is resistant to chemicals and solvents and will remain legible in dirty environments.
- High abrasion and scuff resistance for high performance labeling.
- Meets NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections.

Quantity Per

roll

Product Description

HellermannTyton Pre-Printed Solar Installation Labels are designed to meet the requirements of the National Electrical Code and the International Fire Code as well as being acceptable to the Authority Having Jurisdiction (AHJ). Labels are made with durable UV stable materials and adhesives that are designed to stick to both baked enamel and powder coat surfaces. Where applicable, labels are made using reflective materials for first responder safety. Some pre-printed labels are printable using a thermal transfer printer when variable voltage or series data must be printed and displayed.

Short Description

Hazard Label, 2.0" x 2.0", PET, Yellow, 50/roll

Global Part Name

HL2X2YE-PET-YE

Technical Description

Hazard Label, 2" X 2", Yellow

Width W (Imperial)

2.0

Width W (Metric)

50.8

Thickness T (Metric)

64.0

Height H (Imperial)

2.0

Height H (Metric)

50.80

Material

Polyester (PET)

Material Shortcut

PET

Adhesive

Acrylic

Halogen free

No

Adhesive Operating Temperature	-40°F to +302°F (-40°C to +150°C)
Operating Temperature (Metric)	-40°F to +302°F (-40°C to +150°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
UL Recognized (US)	Yes
Package Quantity(Imperial)	50
Package Quantity (Metric)	50
Customs Number	3919102055
Labels per Column	1
Labels per Row	1
Weight (Metric)	0.521
Weight (Imperial)	31.97