


CU20029-UW1J

SIMPLIFIED DATASHEET

Features

20 character x 2 line display model, using a larger VFD.

Physical dimension

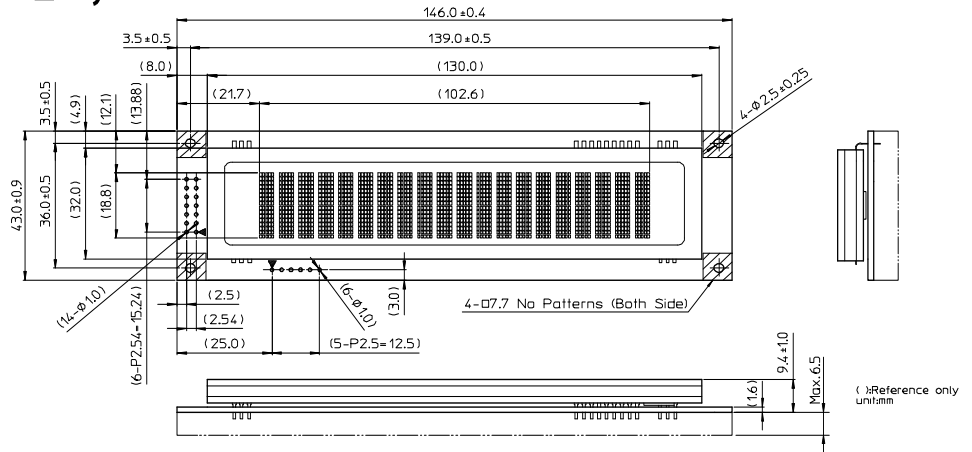

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Logic Input Voltage						
DB0-DB7, RS,R/W(WR), E(RD),SCK, STB	VIH1	2.0	-	VCC	VDC	VCC-VSS= 5.0 V
	VIL1	VSS	-	0.8		
Logic Input Voltage	VIH2	0.7VCC	-	VCC	VDC	VCC-VSS= 5.0 V
SI/SO	VIL2	VSS	-	0.3VCC		
Logic Input Voltage	VIH3	0.8VCC	-	VCC	VDC	VCC-VSS= 5.0 V
/RESET	VIL3	VSS	-	0.2VCC		
Power supply Voltage	VCC-VSS	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Logic Output Voltage	'H'	VCC-0.8	-	-	VDC	IOH = -4 mA
	'L'	-	-	0.6		IOL = 4 mA
	'H'	VCC-0.5	-	-	VDC	IOH = -2 mA
	'L'	-	-	0.5		IOL = 2 mA
Power Supply Current 1	ICC1	-	340	410	mA	Display ON
Power Supply Current 2	ICC2	-	3	10	mA	Display OFF
Power Consumption		-	1.70	2.05	W	Display ON

Optical Characteristics

Parameter	Value
Luminance	350 cd/m ² Min.
Color of illumination	Green (Blue-Green)

Environmental Conditions

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-50 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (Non operation)	539m/s ² (55G) 10ms

Physical Specifications

Parameter	Value	*ANK(Alphabet, Numeric, Kana)
Number of char.	40 (20 x 2)	
Built-in Fonts	5 x 7 ANK, International	
Display area	102.6 x 18.8 mm (X x Y)	
Character size	3.8 x 9.2 mm (X x Y)	
	Underline is not included.	
Character pitch	5.2 mm	
Line pitch	9.6 mm	
Weight	About 70 g	

Interface

8bit/4bit Parallel(TTL), Synchronous Serial (CMOS)

Pin Assignment (Parallel)

Pin No	Signal	Pin No	Signal
1	GND	2	VCC
3	NC	4	RS
5	R/W(WR)	6	E(RD)
7	DB0	8	DB1
9	DB2	10	DB3
11	DB4	12	DB5
13	DB6	14	DB7

(Synchronous Serial)

Pin No	Signal
1	VCC
2	SI/SO
3	GND
4	STB
5	SCK
6	NC

Functions

Parameter	Value
Command compatible with	HD44780 LCD controller
Display ON/OFF	
Brightness Control	
Cursor ON/OFF	
8 User definable character font	
etc.	



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKE ITRON CORP.