

SAC-4P-M12MS-M 8FS

Order No.: 1519765

The illustration shows a 3-pos. version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1519765>

Adapter, from M12 male connector to M8 female connector, 4-pos.

Commercial data

GTIN (EAN)	4046356019958
sales group	D116
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0139 KG
Catalog page information	Page 105 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


Rated current at 40°C	4 A
Rated voltage	30 V
Number of positions	4
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Ambient temperature (operation)	-25 °C ... 90 °C

General characteristics


Standards/regulations	M12 male connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

Diagrams/Drawings

Dimensioned drawing

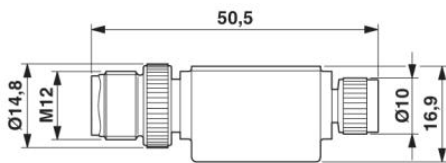


Circuit diagram

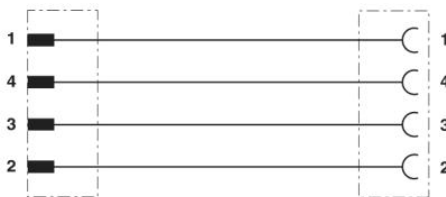


Contact assignment of the M8/M12 adapter

Schematic diagram

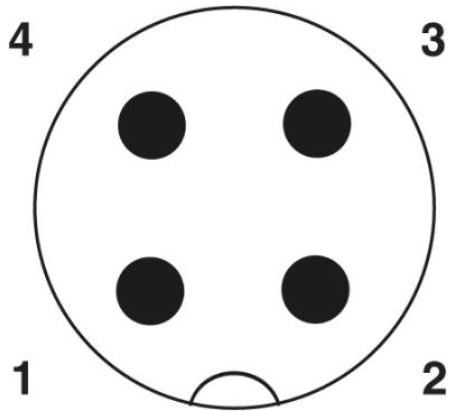

Pin assignment M12 plug, 4-pos., A-coded, view plug side

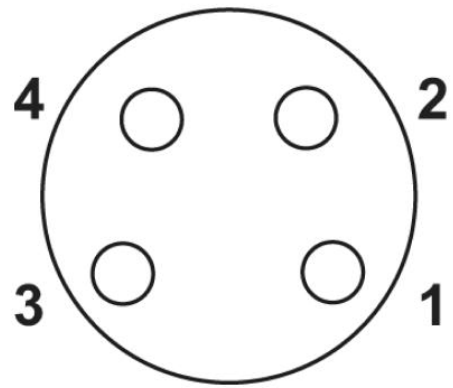

Pin assignment M8 socket, 4-pos., view female side

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;