


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MINIMUM BUNDLE DIAMETER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = "L" ±.3 [7]
MLT2.7WS-LP316	2.0" [51]	2.7" [69]	50	10.2" [259]
MLT4WS-LP316	2.0" [51]	4.0" [102]	50	14.3" [362]
MLT6WS-LP316	2.0" [51]	6.0" [152]	50	20.5" [521]
MLT8WS-LP316	2.0" [51]	8.0" [203]	50	26.8" [679]

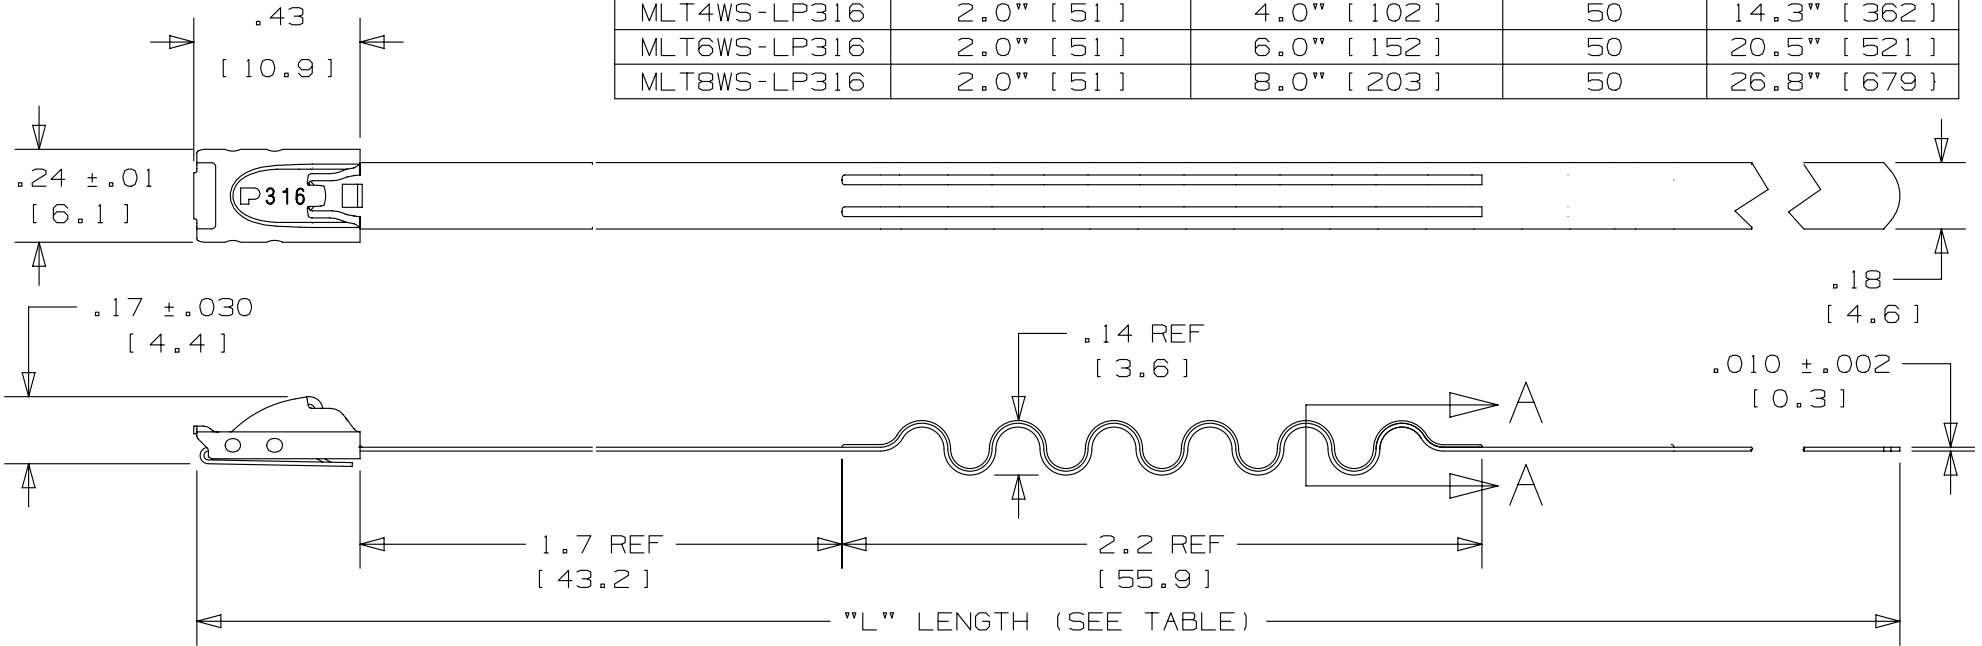

NOTES:

- APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
- MINIMUM LOOP TENSILE STRENGTH - 200 LBS (890 NEWTONS) WHEN TESTED ON A 3" MANDREL
PART NO. MLT2.7WS-LP316 TESTED ON A 1 1/2" MANDREL
- BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
- TOLERANCES:
.XXX = ±.010 [.25] .XX = ±.02 [.5]
.X = ±.03 [.8] ANGLES = ±2°
- MATERIAL: 316 STAINLESS STEEL

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A - A
SCALE: 8x

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
09A	2/12	MIM	RGRO	----	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE						
WAVE-TY STANDARD SERIES 316 STAINLESS STEEL CUSTOMER DRAWING						
ITEM REVISION NAME N41125BS/10				PANDUIT		
DATASET FILE NAME N41125BS_DC/10A						
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL: 316 STAINLESS STEEL		
.x ± .1 [2.54]		.xxx ± .005 [.127]		DRAWING NUMBER: N41125BS_DC		
.xx ± .01 [.25]		ANGLES ± 5°		THIRD ANGLE PROJECTION		
DRAWN BY JAMB		DATE 2/12		CHK DPN		SCALE 2:1
				SHT 1 OF 1		A